

**MARKETS SERVED:**

# FIRE MILITARY INDUSTRIAL LAW ENFORCEMENT OUTDOOR DIVE



Lighting tools – they’re a core element of every toolbox. They have a straightforward and simple purpose. Yet, when you’re in a situation that requires a lighting tool, you want to make sure you have the right one. Pelican understands the critical importance of this tool. We provide a wide range of Advanced Lighting Systems to support professionals, outdoor enthusiasts and everyday do-it-yourself hobbyists. Regardless of the purpose, our lighting tools and remote area lighting systems enable you to accomplish your tasks in a safer and more efficient manner.

With this perspective, Pelican relentlessly pursues innovation for new lighting tool products and manufacturing processes. We have adopted the ANSI FL-1 flashlight standards (performance symbols and standards that effectively communicate a lighting tool’s features and benefits) and continue to increase the number of industry leading safety approvals for specific models.

Our new Lighting catalog features multiple technology advances. These include LED performance upgrades, new switch features,

upgraded safety approvals and enhanced packaging. You’ll see that the contents within dovetail our commitment to environmentally friendly practices. Many of our flashlights use LED’s and provide several benefits that help us protect our planet. LED’s are longer lasting, promote extended battery life and are much brighter than incandescent bulbs.

From basic models to the high-performance 9410 LED Lantern (our brightest handheld flashlight to date) and the 9470 Remote Area Lighting System (which delivers 8,000 lumens), we are ready to provide world-class support for our dealers and end users across the globe. And, all of this comes with Pelican’s industry-leading guarantee of excellence.

So look through our new catalog and discover the ideal lighting tools for your specific needs.

# CONTENTS

<b>1</b>	<b>Message from the President and CEO</b>
<b>3-4</b>	<b>Performance Standards and Ratings</b>
<b>5-6</b>	<b>Safety</b>
<b>7-10</b>	<b>Remote Area Lighting Systems</b>
<b>11-12</b>	<b>Personal Lights</b>
<b>13-14</b>	<b>Medium Duty Lights</b>
<b>15-16</b>	<b>Tactical/Duty Lights</b>
<b>17-18</b>	<b>Tactical/Duty LED Lights</b>
<b>19-22</b>	<b>LED and Recoil™ LED Lights</b>
<b>23-24</b>	<b>Headlights</b>
<b>25-26</b>	<b>Specialty Lights</b>
<b>27-28</b>	<b>Dive Lights</b>
<b>29-30</b>	<b>Heavy Duty Lights</b>
<b>31-32</b>	<b>Light Mounting Systems and Holsters</b>
<b>33-34</b>	<b>Helmet Light Holders</b>
<b>35-39</b>	<b>Light Specification Charts</b>
<b>40</b>	<b>Private Label Program/Cases and Specialty Products</b>
<b>41</b>	<b>Global Locations</b>
<b>42</b>	<b>Product Guarantee and Warranty</b>

# PERFORMANCE STANDARDS AND RATINGS

## ANSI STANDARDS (American National Standards Institute)

Why create standards? While Pelican was one of the first manufacturers to use quantifiable test procedures, the need was recognized to develop a common language that customers could use to select the right flashlight for their specific

needs. As a result, the American National Standards Institute (ANSI), with input from the flashlight industry, developed performance standards and symbols to effectively communicate a flashlight's features and benefits.

### GLOSSARY OF TERMS

**CANDELA** – A unit of measurement of the intensity of light that is emitted by a light source in a particular direction.

**LUX** – The unit of luminous flux in the International System, equal to the amount of light given out through a solid angle by a source of one candela intensity radiating equally in all directions.

**LUMEN** – A unit of measurement of the amount of brightness that comes from a light source. Lumens define "luminous flux," which is energy within the range of frequencies we perceive as light.


#### INTEGRATING SPHERE -

An integrating sphere is a measurement device with an entrance port that can accept all the directional light output of the device under test, or can totally enclose the device itself. The walls of the sphere should be highly diffuse with high reflectivity (>80%) and the spectroradiometer should be shielded from direct view of the device under test by a baffle system.

**IP (Ingress Protection)** – Ingress Protection (IP) ratings specify the environmental protection the enclosure

provides. The IP rating normally has two numbers (IPXX). The first number represents protection from solid objects or materials (dust) where the second number represents protection from liquids (water). With the IP rating IP 54, 5 describes the level of protection from solid objects and 4 describes the level of protection from liquids.

**RECHARGEABLE** – Denotes a flashlight which contains rechargeable batteries and charging station. These models are shown with the rechargeable icon.

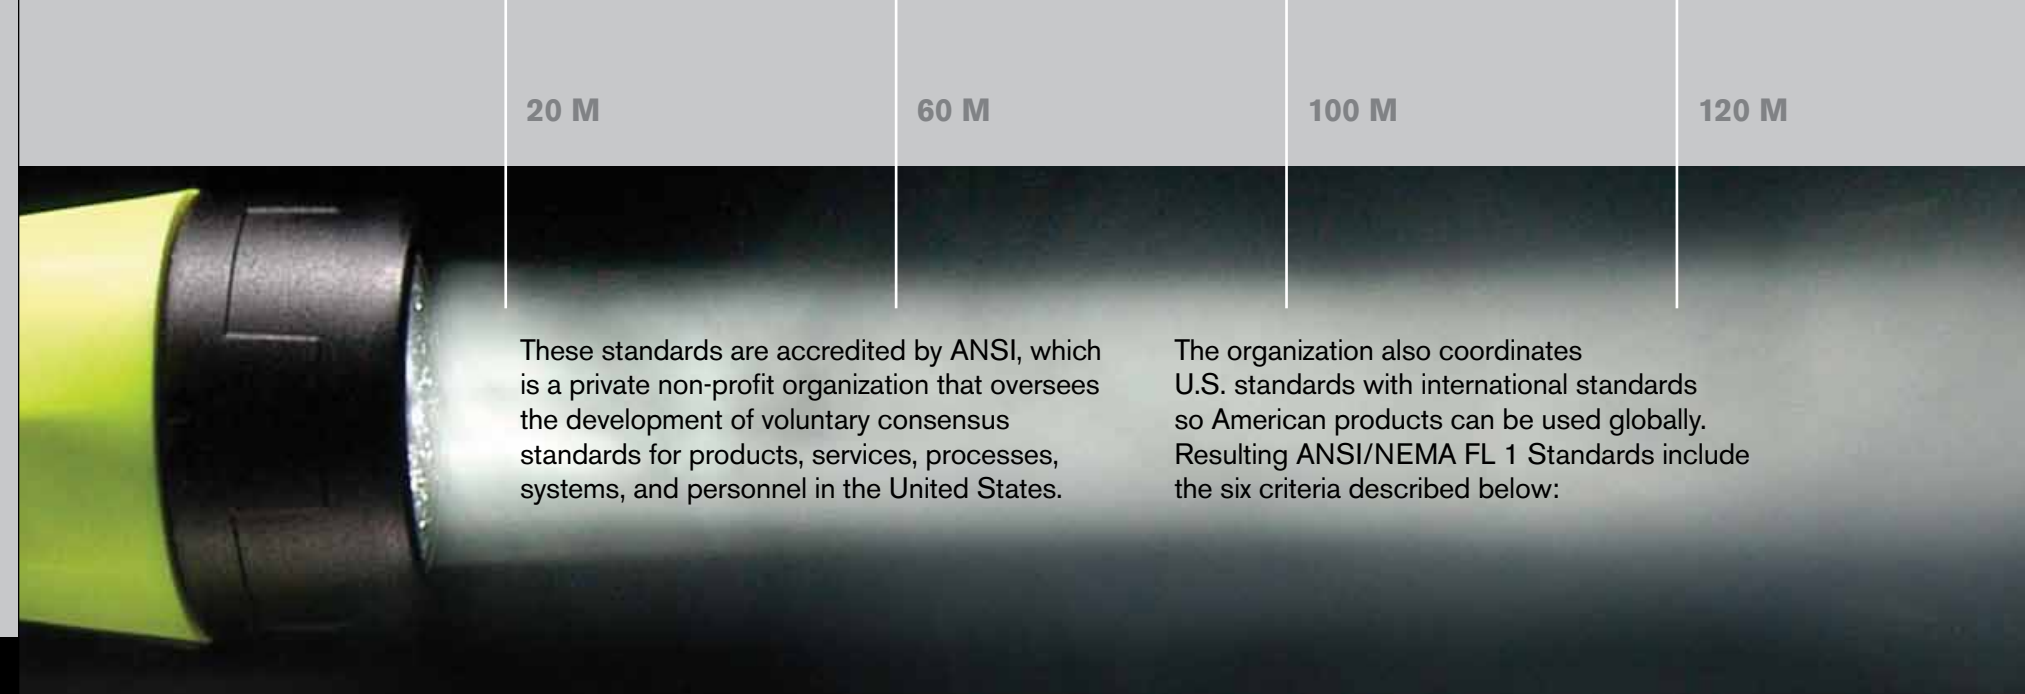

20 M

60 M

100 M

120 M

These standards are accredited by ANSI, which is a private non-profit organization that oversees the development of voluntary consensus standards for products, services, processes, systems, and personnel in the United States.

The organization also coordinates U.S. standards with international standards so American products can be used globally. Resulting ANSI/NEMA FL 1 Standards include the six criteria described below:




#### LIGHT OUTPUT

Light Output is the total luminous flux. It is the total quantity of emitted overall light energy as measured by integrating the entire angular output of the portable light source. Light output in this standard is expressed in units of lumens.



#### RUN TIME

Run Time is defined as the duration of time from the initial light output value – defined as 30 seconds after the point the device is first turned on – using fresh batteries, until the light output reaches 10% of the initial value.



#### BEAM DISTANCE

Beam Distance is defined as the distance from the device at which the light beam is 0.25 lux (0.25 lux is approximately the equivalent of the light emitted from the full moon "on a clear night in an open field").



#### PEAK BEAM INTENSITY

Peak Beam Intensity is the maximum luminous intensity typically along the central axis of a cone of light. The value is reported in candela and does not change with distance.



#### WATER RESISTANT


Water Resistant – IPX4 Water splashed against the device from any direction shall have no harmful effects.



#### WATER PROOF/ SUBMERSIBLE

Water Proof – IPX7 – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is temporarily immersed in water under standardized conditions of pressure and time.

Submersible – IPX8 – Ingress of water in quantities causing harmful effects shall not be possible when the enclosure is continuously immersed in water under conditions which shall be stated by manufacturer, but which are more severe than for IPX7.

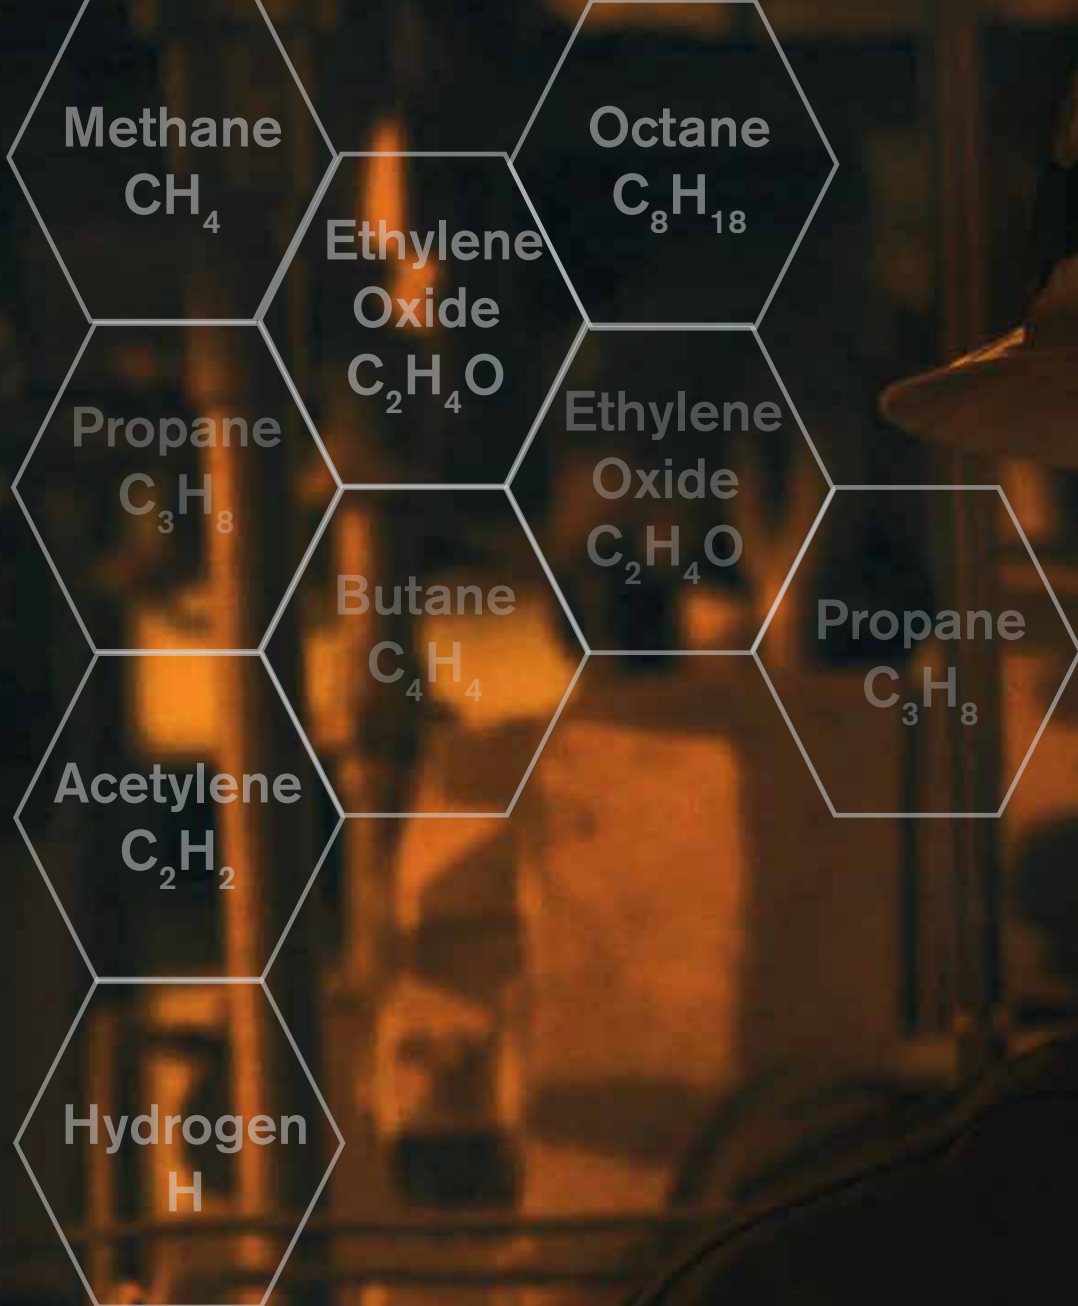

# SAFETY

## YOUR PASSPORT THROUGH HAZARDOUS LOCATIONS

Whether working in a **Class I** Oil Refinery or in the silo of a **Class III** Textile Mill, safety is always a concern. Your lighting tool shouldn't add to your worries. Pelican builds lighting tools approved for any work environment. In fact we make more safety approved lights certified for **CLASS I II III Div. 1** and groups **ABCDEFG** than anyone else. To find the right light for your job visit us @ [Pelican.com/safety](https://www.pelican.com/safety).




HAZARDOUS AREA ELECTRICAL GUIDELINES			
CLASS I	DIVISION 1	Flammable Gases, Vapors, or Liquids (Acetylene, Hydrogen, Ethylene, Propane)	Oil Refinery, Paint Warehouse Spray Booth, Offshore Oil Rig
	DIVISION 2		
CLASS II	DIVISION 1	Combustible Dusts (Metals [Div. 1 only], Coal, Grain)	Coal Mine, Munitions Factory Grain Silo, Hay Storage Facility
	DIVISION 2		
CLASS III	DIVISION 1	Ignitable Fibers & Flyings (Machined Magnesium)	Paper Mill, Woodworking Facility Textile Mill, Cotton Gin
	DIVISION 2		
<p><b>Division 1 (hazard likely):</b> Where volatile substances can exist all of the time or some of the time under normal operating conditions.</p> <p><b>Division 2 (hazard not likely):</b> Where volatile substances are not likely to exist under normal operating conditions.</p>			

# REMOTE AREA LIGHTING SYSTEMS

## THE MOST INNOVATIVE RECHARGEABLE LIGHTING SYSTEM ON THE MARKET

Rechargeable Battery Powered Lighting for the most demanding tasks

- Redefines the Portable Lighting category
- Over 10 models and growing
- Best in Class performance and durability
- Designed for Heavy Duty Jobs
- Safe, Noise Free, Fume Free,
- Spot Lighting, Flood Lighting, NVG Lighting
- New Intelligent Control Switch Technology optimizes power output vs burntime
- New Safety approved 9435 for hazardous locations

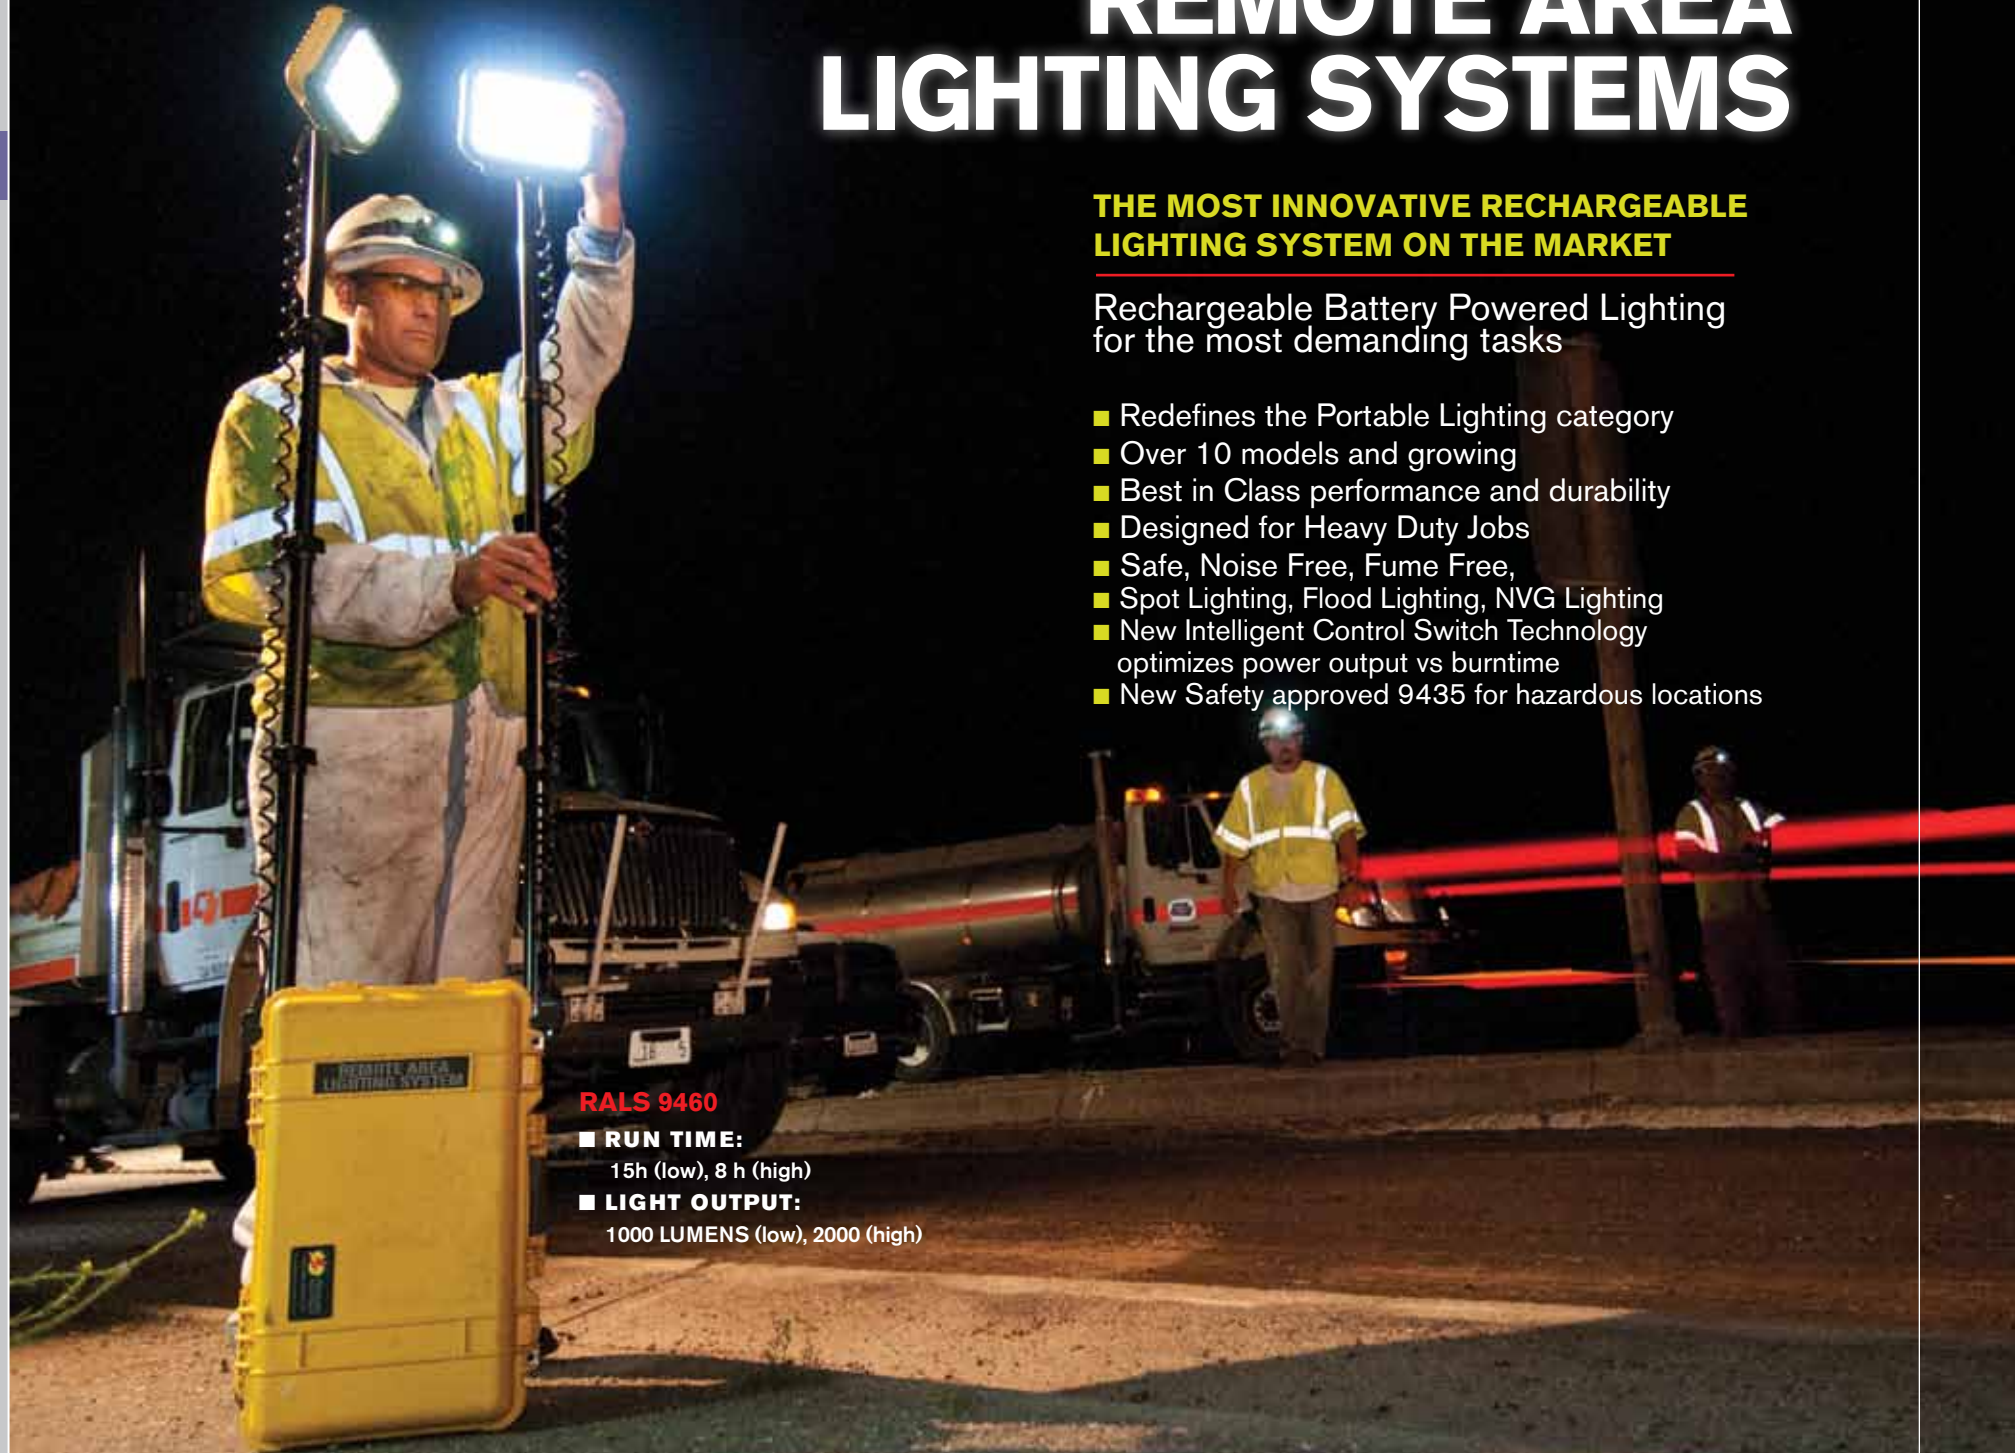

### RAL 9460

- **RUN TIME:**  
15h (low), 8 h (high)
- **LIGHT OUTPUT:**  
1000 LUMENS (low), 2000 (high)

### 9430 REMOTE AREA LIGHTING SYSTEM



High Flux LED
12v Rechargeable, Sealed
15.75" (40 cm) Closed 32.28" (82 cm) Extended
■ ■
N/A
1000 (Low), 2000 (High)
15 hrs. (Low), 8 hrs. (High)
90°
24 per head
1

LIGHT SOURCE
BATTERIES
LENGTH
COLORS
APPROVALS
LIGHT OUTPUT
RUN TIME
BEAM SPREAD
NUMBER OF LEDs
LAMP HEADS

### 9435 REMOTE AREA LIGHTING SYSTEM



High Flux LED
12v Rechargeable, Sealed
15.75" (40 cm) Closed 32.28" (82 cm) Extended
■ ■
CI D2
750 (Low), 1500 (High)
10 hrs. (Low), 5 hrs. (High)
90°
18 per head
1

### NEW

### 9430IR INFRARED REMOTE AREA LIGHTING SYSTEM



Infrared 940nm
12v Rechargeable, Sealed
15.75" (40 cm) Closed 32.28" (82 cm) Extended
■
N/A
N/A
15 hrs. (Low), 8 hrs. (High)
N/A
24 per head
1

### 9430SL SPOT LIGHT REMOTE AREA LIGHTING SYSTEM



High Flux LED
12v Rechargeable, Sealed
15.75" (40 cm) Closed 32.28" (82 cm) Extended
■
N/A
1000 (Low), 2000 (High)
15 hrs. (Low), 8 hrs. (High)
10°
24 per head
1



**RAL 9435**  
PELICAN'S FIRST SAFETY APPROVED  
REMOTE AREA LIGHTING SYSTEM  
Class I Division 2 groups ABCD T4

**9440 REMOTE AREA LIGHTING SYSTEM**



LIGHT SOURCE	LED
BATTERIES	NIMH
LENGTH	37.4" (95 cm) Closed 86.25" (219 cm) Deployed
COLORS	■ ■
APPROVALS	N/A
LIGHT OUTPUT	1200 (Low), 2400 (High)
RUN TIME	6 hrs. (Low), 3 hrs. (High)
BEAM SPREAD	120°
NUMBER OF LEDS	10 per head
LAMP HEADS	1



LIGHT SOURCE	
BATTERIES	
LENGTH	
COLORS	
APPROVALS	
LIGHT OUTPUT	
RUN TIME	
BEAM SPREAD	
NUMBER OF LEDS	
LAMP HEADS	



**9460 REMOTE AREA LIGHTING SYSTEM**

LIGHT SOURCE	High Flux LED
BATTERIES	12v Rechargeable, Sealed
LENGTH	22.0" (55.9 cm) Closed 70.87" (179.9 cm) Extended
COLORS	■ ■
APPROVALS	N/A
LIGHT OUTPUT	2000 (Low), 4000 (High)
RUN TIME	14 hrs. (Low), 7 hrs. (High)
BEAM SPREAD	90°
NUMBER OF LEDS	24 per head
LAMP HEADS	2



LIGHT SOURCE	
BATTERIES	
LENGTH	
COLORS	
APPROVALS	
LIGHT OUTPUT	
RUN TIME	
BEAM SPREAD	
NUMBER OF LEDS	
LAMP HEADS	

**9470 REMOTE AREA LIGHTING SYSTEM**



LIGHT SOURCE	High Flux LED
BATTERIES	12v Rechargeable, Sealed
LENGTH	24.83" (63 cm) Closed 72.85" (185 cm) Extended
COLORS	■ ■
APPROVALS	N/A
LIGHT OUTPUT	4000 (Low), 8000 (High)
RUN TIME	14 hrs. (Low), 7 hrs. (High)
BEAM SPREAD	90°
NUMBER OF LEDS	24 per head
LAMP HEADS	4

LIGHT SOURCE	
BATTERIES	
LENGTH	
COLORS	
APPROVALS	
LIGHT OUTPUT	
RUN TIME	
BEAM SPREAD	
NUMBER OF LEDS	
LAMP HEADS	




**9500 SHELTER LIGHTING SYSTEM**



LIGHT SOURCE	High Flux LED
BATTERIES	N/A
LENGTH	20.62" (52.4 cm)
COLORS	■
APPROVALS	N/A
LIGHT OUTPUT	400 (Red LED), 2000 (White LED)
RUN TIME	N/A
BEAM SPREAD	210° Diffused
NUMBER OF LEDS	36 per head - 24 white/12 red
LAMP HEADS	3

LIGHT SOURCE	
BATTERIES	
LENGTH	
COLORS	
APPROVALS	
LIGHT OUTPUT	
RUN TIME	
BEAM SPREAD	
NUMBER OF LEDS	
LAMP HEADS	



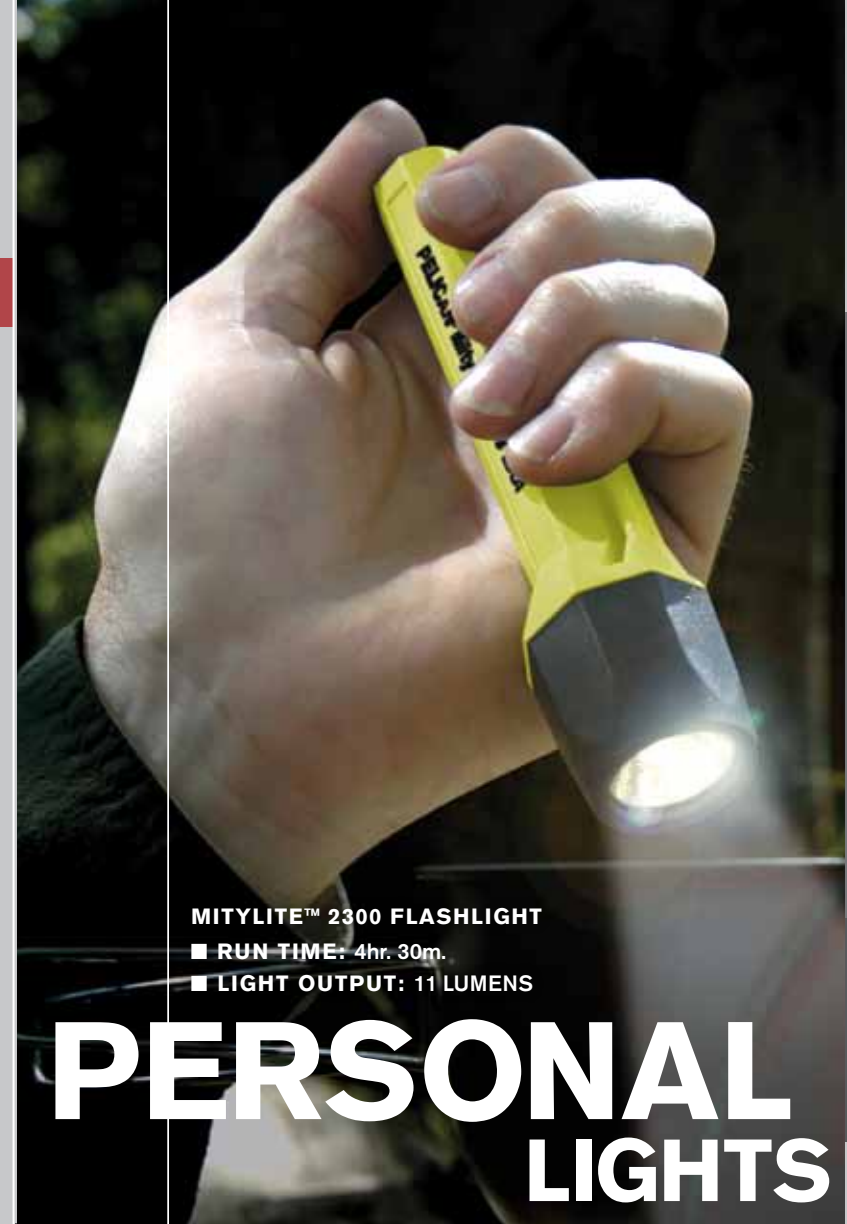

**MITYLITE™ 2300 FLASHLIGHT**  
■ RUN TIME: 4hr. 30m.  
■ LIGHT OUTPUT: 11 LUMENS

# PERSONAL LIGHTS

## CLOSE AND PERSONAL LIGHTING

Comfortable in your back pocket but confident in tough situations where safety is paramount. These are your handy go-to lights built tough with brightness that penetrates thick smoke and fog.

**MITYLITE™ 1900**

LIGHT SOURCE	XENON				
BATTERIES	2 AAA Alkaline (Included)				
LENGTH	4.09" (10.4cm)				
COLORS					
APPROVALS	CI D1				
ANSI STANDARDS					
	LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	
	WATERPROOF & SUBMERSIBLE				

**1910 LED** **NEW**

LIGHT SOURCE	LED				
BATTERIES	1 AAA Alkaline (Included)				
LENGTH	3.6" (9.1 cm)				
COLORS					
APPROVALS	N/A				
ANSI STANDARDS					
	LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	
	WATER RESISTANT				

**1920 LED** **NEW**

LIGHT SOURCE	LED				
BATTERIES	2 AAA Alkaline (Included)				
LENGTH	5.3" (13.5 cm)				
COLORS					
APPROVALS	N/A				
ANSI STANDARDS					
	LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	
	WATER RESISTANT				

**MITYLITE™ 1960 LED**

LIGHT SOURCE	LED				
BATTERIES	2 AAA Alkaline (Included)				
LENGTH	5.48" (13.9 cm)				
COLORS					
APPROVALS	N/A				
ANSI STANDARDS					
	LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	
	WATERPROOF & SUBMERSIBLE				

**MITYLITE™ 1965 LED**

LIGHT SOURCE	XENON				
BATTERIES	2 AAA Alkaline (Included)				
LENGTH	5.48" (13.9 cm)				
COLORS					
APPROVALS	CI II III D1				
ANSI STANDARDS					
	LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	
	WATER RESISTANT				

**TRACKER™ 2140**

LIGHT SOURCE	XENON				
BATTERIES	2 AAA Alkaline (Included)				
LENGTH	3.5" (8.9cm)				
COLORS					
APPROVALS	CI D2				
ANSI STANDARDS					
	LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	
	WATERPROOF & SUBMERSIBLE				

**VERSABRITE™ 2250 DELUXE LIGHT**


LIGHT SOURCE	XENON				
BATTERIES	2 AA Alkaline (Included)				
LENGTH	3.87" (9.8cm)				
COLORS					
APPROVALS	CI II D2				
ANSI STANDARDS					
	LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	
	WATER RESISTANT				

**MITYLITE™ 2300**

LIGHT SOURCE	XENON				
BATTERIES	2 AA Alkaline (Included)				
LENGTH	5.62" (14.3cm)				
COLORS					
APPROVALS	CI D1				
ANSI STANDARDS					
	LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	
	WATER RESISTANT				

**MITYLITE™ 2340**

LIGHT SOURCE	XENON				
BATTERIES	2 AA Alkaline (Included in select packaging)				
LENGTH	6.25" (15.9cm)				
COLORS					
APPROVALS	CI D1				
ANSI STANDARDS					
	LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	
	WATER RESISTANT				

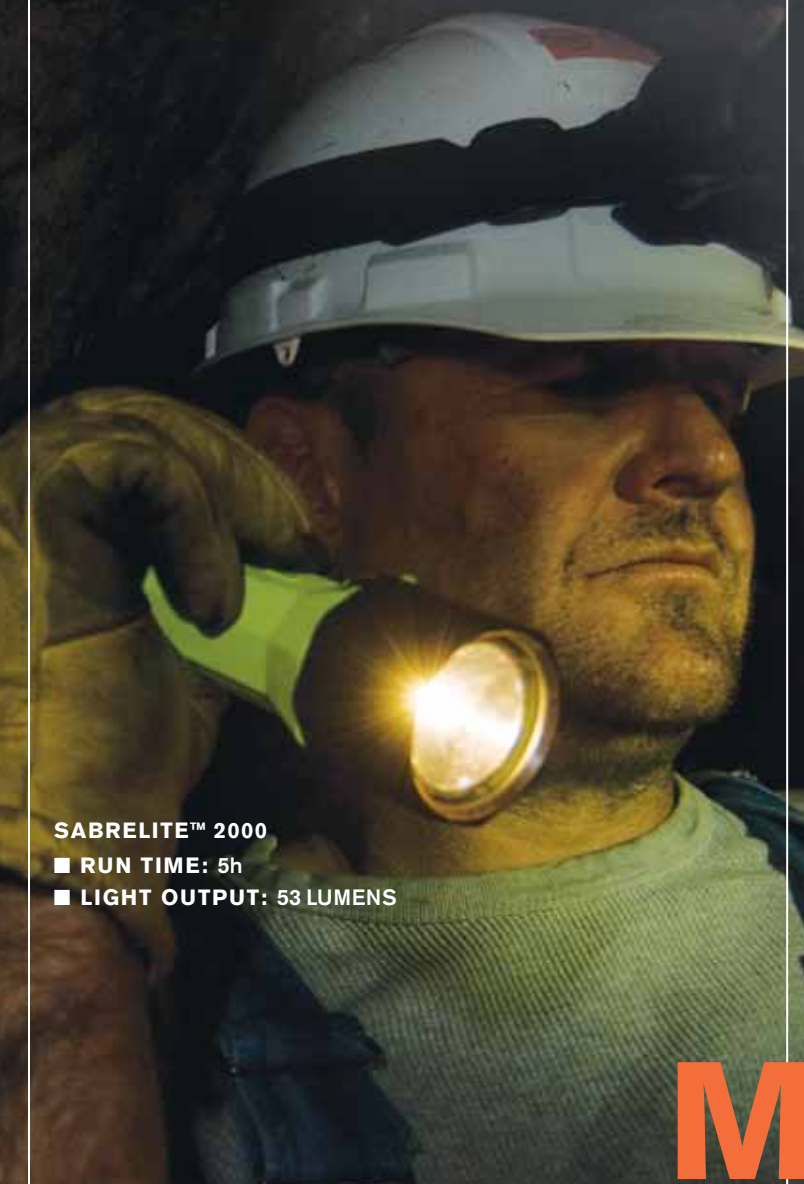

**SABRELITE™ 2000**  
■ RUN TIME: 5h  
■ LIGHT OUTPUT: 53 LUMENS

# MEDIUM DUTY LIGHTS

**MEDIUM SIZE, LARGE PERFORMANCE**  
The most safety approved lighting tools for the hard working professional and extreme outdoor enthusiasts. Features include chemical-resistant bodies and hi-power Xenon lamp modules.

**PELILITE™ 1800**

LIGHT SOURCE	XENON			
BATTERIES	2 C Alkaline (Not included)			
LENGTH	6" (15.2cm)			
COLORS	Black, Yellow, Orange			
APPROVALS	CI II D2			
ANSI STANDARDS				
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

**POCKET SABRE™ 1820**

LIGHT SOURCE	XENON			
BATTERIES	2 C Alkaline (Included in select packaging)			
LENGTH	5.83" (14.8cm)			
COLORS	Black, Yellow, Orange			
APPROVALS	CI II III D2			
ANSI STANDARDS				
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

**SABRELITE™ 2000**

LIGHT SOURCE	XENON			
BATTERIES	3 C Alkaline (Not included)			
LENGTH	7.79" (19.8cm)			
COLORS	Black, Yellow, Orange			
APPROVALS	CI D2			
ANSI STANDARDS				
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

**SABRELITE™ 2000 PHOTOLUMINESCENT**

LIGHT SOURCE	XENON			
BATTERIES	3 C Alkaline (Not included)			
LENGTH	7.79" (19.8cm)			
COLORS	Yellow			
APPROVALS	CI D2			
ANSI STANDARDS				
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

**STEALTHLITE™ 2400**

LIGHT SOURCE	XENON			
BATTERIES	4 AA Alkaline (Included)			
LENGTH	6.49" (16.5cm)			
COLORS	Black, Yellow, Orange, Green			
APPROVALS	CI D1			
ANSI STANDARDS				
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

**STEALTHLITE™ 2400 PHOTOLUMINESCENT**

LIGHT SOURCE	XENON			
BATTERIES	4 AA Alkaline (Included)			
LENGTH	6.49" (16.5cm)			
COLORS	Yellow			
APPROVALS	CI D1			
ANSI STANDARDS				
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

**MITYLITE™ 2430**

LIGHT SOURCE	XENON			
BATTERIES	4 AA Alkaline (Included)			
LENGTH	6.5" (16.5cm)			
COLORS	Black, Yellow			
APPROVALS	CI D2			
ANSI STANDARDS				
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

**STEALTHLITE™ RECHARGEABLE 2450**

LIGHT SOURCE	XENON			
BATTERIES	4 AA NiMH (Included)			
LENGTH	6.5" (16.5cm)			
COLORS	Black, Yellow			
APPROVALS	CI II D2			
ANSI STANDARDS				
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE



**M6 2320 LED**  
 ■ RUN TIME: 6 hrs.  
 ■ LIGHT OUTPUT: 100 LUMENS

# TACTICAL/DUTY LIGHTS

## TACTICAL OR PATROL, PELICAN HAS YOU COVERED

These handheld and firearm-mountable lights will leave subjects frozen in their tracks. They are lightweight with no-slip bodies for a sure grip. Push button switch is easy to operate, even when wearing thick gloves. Safety features include a polarity guard tray that makes operating the flashlight impossible if cells are inverted and prevents dangerous outgassing. Smaller models make the ideal backup to the larger, primary patrol lights.

### M6 2320



XENON  
 2 CR123 Lithium (Included)  
 5.51" (14cm)  
 ■  
 N/A

82 LUMENS	1h 15min	145m	5260cd	
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

### PM6 3320



XENON  
 2 CR123 Lithium (Included)  
 5.27" (13.4cm)  
 ■ ■ ■  
 N/A

81 LUMENS	1h 30min	131m	4330cd	
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

### 3390 KNIFE/LITE COMBO



XENON  
 2 CR123 Lithium (Included)  
 5.27" (13.4cm)  
 ■  
 N/A

81 LUMENS	1h 30min	131m	4330cd	
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

### M10 8040



XENON  
 4 C Alkaline (Not included)  
 11.25" (28.6cm)  
 ■ ■  
 CI II III D2

67 LUMENS	5h 15min	198m	9820cd	
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

### M11 RECHARGEABLE 8050




XENON  
 4 C NiCad (Included)  
 11.25" (28.6cm)  
 ■ ■  
 N/A

137 LUMENS	1h 30min	234m	13707cd	
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

LIGHT SOURCE	BATTERIES	LENGTH	COLORS	APPROVALS	ANSI STANDARDS
LIGHT SOURCE	BATTERIES	LENGTH	COLORS	APPROVALS	ANSI STANDARDS
LIGHT SOURCE	BATTERIES	LENGTH	COLORS	APPROVALS	ANSI STANDARDS
LIGHT SOURCE	BATTERIES	LENGTH	COLORS	APPROVALS	ANSI STANDARDS
LIGHT SOURCE	BATTERIES	LENGTH	COLORS	APPROVALS	ANSI STANDARDS
LIGHT SOURCE	BATTERIES	LENGTH	COLORS	APPROVALS	ANSI STANDARDS
LIGHT SOURCE	BATTERIES	LENGTH	COLORS	APPROVALS	ANSI STANDARDS
LIGHT SOURCE	BATTERIES	LENGTH	COLORS	APPROVALS	ANSI STANDARDS
LIGHT SOURCE	BATTERIES	LENGTH	COLORS	APPROVALS	ANSI STANDARDS
LIGHT SOURCE	BATTERIES	LENGTH	COLORS	APPROVALS	ANSI STANDARDS



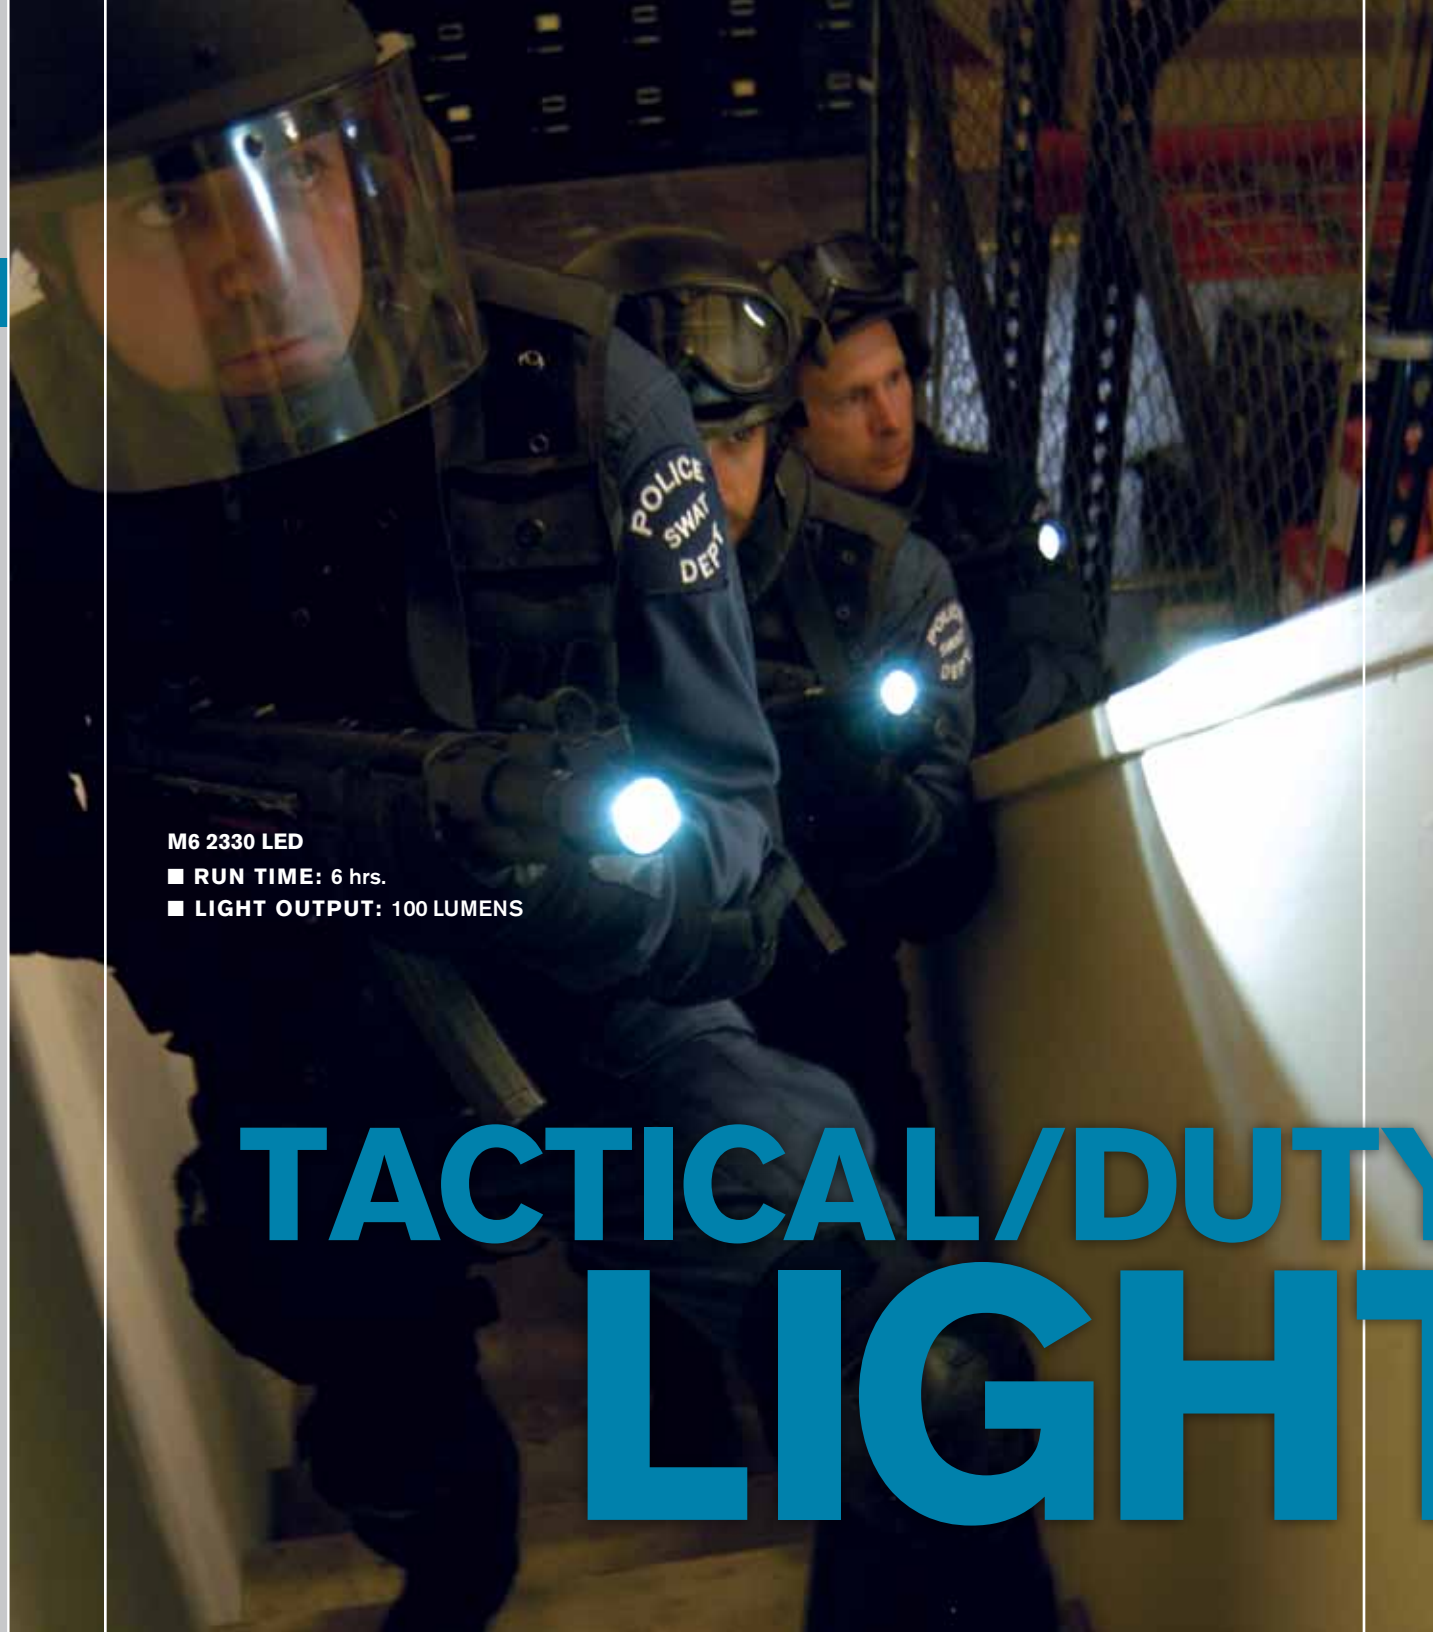

**M6 2330 LED**  
 ■ RUN TIME: 6 hrs.  
 ■ LIGHT OUTPUT: 100 LUMENS

# TACTICAL/DUTY LED LIGHTS

## ADVANCED LED TECHNOLOGY

Packed with advanced LEDs that are powerful yet highly efficient for extended run times. Built tough to withstand the hard knocks that come with the job. Select models have a unique no-slip grenade grip body. Includes the 7060 LED, featuring patented dual switch technology. It was designed from a collaboration between Pelican and the City of Los Angeles Police Department (LAPD™) and is standard issue for numerous police departments.

### M6 2330 LED

	LED			
	2 CR123 Lithium (Included)			
	5.51" (14cm)			
	█			
	N/A			
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

- LIGHT SOURCE
- BATTERIES
- LENGTH
- COLORS
- APPROVALS

ANSI STANDARDS

### 2360 LED

	LED			
	2 AA Alkaline (Not Included)			
	6.1" (15.5cm)			
	█			
	N/A			
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

- LIGHT SOURCE
- BATTERIES
- LENGTH
- COLORS
- APPROVALS

ANSI STANDARDS

### M6 3W 2390 LED

	LED			
	2 CR123 Lithium (Included)			
	5.31" (13.5cm)			
	█ █			
	N/A			
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

- LIGHT SOURCE
- BATTERIES
- LENGTH
- COLORS
- APPROVALS

ANSI STANDARDS

### PM6 3330 LED

	LED			
	2 CR123 Lithium (Included)			
	5.27" (13.4cm)			
	█ █ █			
	N/A			
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

### 7060 LED

	LED			
	1 3.7 V, 2200 mAh Lithium-Ion (Included)			
	8.65" (22cm)			
	█			
	N/A			
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

### 8060 LED


	LED			
	4 C SIZE Ni-MH (Included)			
	12.67" (32.2cm)			
	█			
	N/A			
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

**STEALTHLITE™ 2410 RECOIL™ LED**  
 ■ RUN TIME: 7 hrs. 15 mins.  
 ■ LIGHT OUTPUT: 72 LUMENS

# LED AND RECOIL™ LED LIGHTS

## LED PRESCRIPTION FOR THE NEAR OR FAR SIGHTED

From the garage to the refinery, from expeditions up to K2 to deep dives in Vanuatu – you'll find your bright, efficient, and durable LED lighting tool here. All are engineered with leading-edge technology and a strong build quality. Includes the innovative Recoil™ LED Technology™ that reflects light to a super bright, concentrated beam.

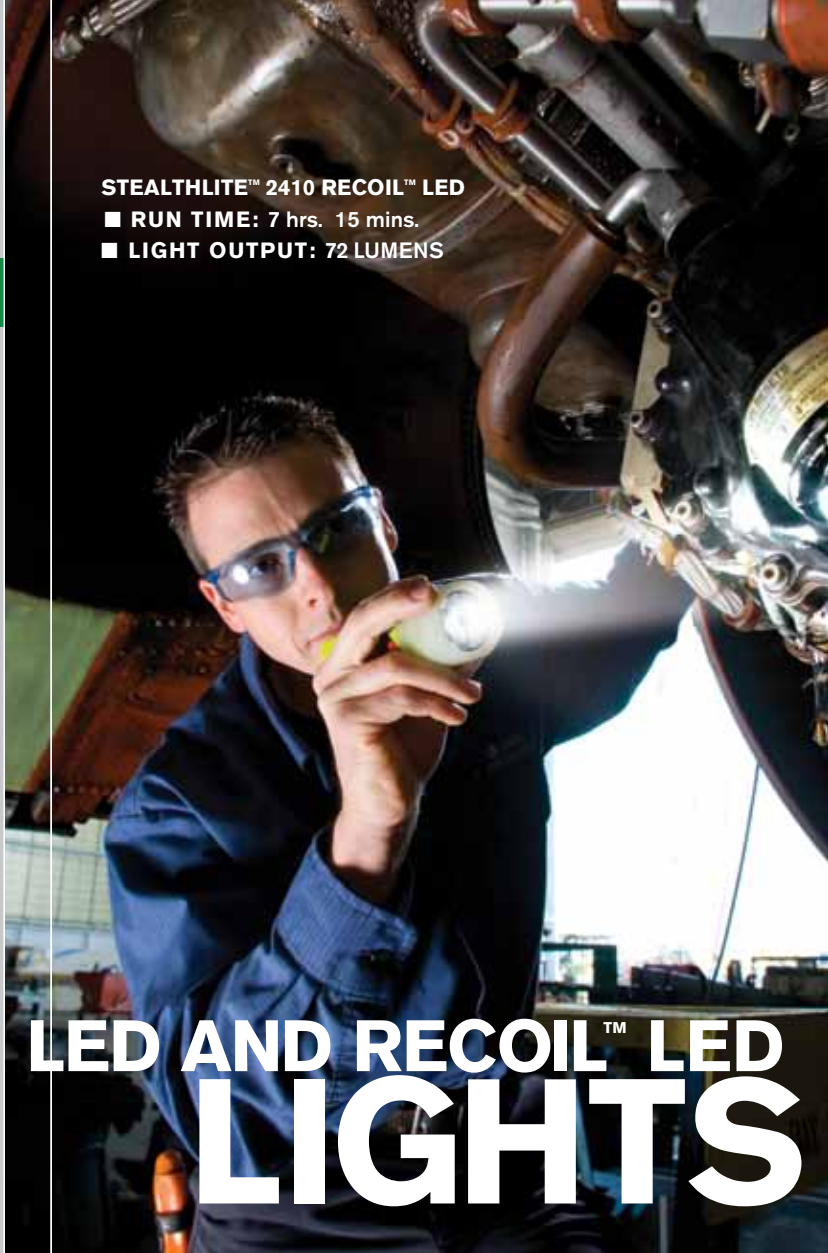

### L4™ 1830 LED

LIGHT SOURCE	LED			
BATTERIES	3 AAAA Alkaline (Included)			
LENGTH	6.2" (15.7cm)			
COLORS				
APPROVALS	CI D1			
ANSI STANDARDS				
	LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY

### L1™ 1930 LED

LIGHT SOURCE	LED			
BATTERIES	4 LR 44 Alkaline (Included)			
LENGTH	2.64" (6.7cm)			
COLORS				
APPROVALS	CI D1			
ANSI STANDARDS				
	LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY

### MINI FLASHER™ 2130 LED

LIGHT SOURCE	LED			
BATTERIES	2 L1154 Alkaline (Included)			
LENGTH	1.73" (4.4cm)			
COLORS				
APPROVALS	N/A			
ANSI STANDARDS	4.7 LUMENS (Non ANSI)	130h (Non ANSI)	N/A	N/A
	LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY

### MINI FLASHER™ 2130IR LED

LIGHT SOURCE	LED			
BATTERIES	2 L1154 Alkaline (Included)			
LENGTH	1.73" (4.4cm)			
COLORS				
APPROVALS	N/A			
ANSI STANDARDS	N/A	65h (Non ANSI)	N/A	N/A
	LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY

### VB3™ 2220 LED

LIGHT SOURCE	LED			
BATTERIES	2 CR2032 Lithium (Included)			
LENGTH	3.5" (8.9cm)			
COLORS	*translucent			
APPROVALS	CI D1			
ANSI STANDARDS				
	LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY

### VB3™ 2220NV LED

LIGHT SOURCE	LED			
BATTERIES	2 CR2032 Lithium (Included)			
LENGTH	3.5" (8.9cm)			
COLORS				
APPROVALS	CI D1			
ANSI STANDARDS	1.0 LUMENS (Non ANSI)	100h (Non ANSI)	N/A	N/A
	LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY

### 2365 LED FLEX NECK

LIGHT SOURCE	LED			
BATTERIES	2 AA Alkaline (Not Included)			
LENGTH	21.92" (55.7cm)			
COLORS				
APPROVALS	N/A			
ANSI STANDARDS				
	LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY

### SABRELITE™ 2010 RECOIL™ LED

LIGHT SOURCE	Recoil™ LED			
BATTERIES	3 C Alkaline (Not included)			
LENGTH	8.11" (20.6cm)			
COLORS				
APPROVALS	CI II III D1			
ANSI STANDARDS				
	LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY

### SABRELITE™ 2010 RECOIL™ LED PHOTOLUMINESCENT

LIGHT SOURCE	Recoil™ LED			
BATTERIES	3 C Alkaline (Not included)			
LENGTH	8.11" (20.6cm)			
COLORS				
APPROVALS	CI II III D1			
ANSI STANDARDS				
	LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY



**2490 RECOIL™ LED (WITH TRAFFIC WAND)**

- RUN TIME: 15 hrs.
- LIGHT OUTPUT: 51 LUMENS

**SABRELITE™ 2020 RECOIL™ LED**



Recoil™ LED  
 3 C Alkaline (Not included)  
 8.75" (22.2cm)  
 ■ ■  
 CI II D1

LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

LIGHT SOURCE  
 BATTERIES  
 LENGTH  
 COLORS  
 APPROVALS

ANSI STANDARDS

**STEALTHLITE™ 2410 RECOIL™ LED**



Recoil™ LED  
 4 AA Alkaline (Included)  
 7" (17.8cm)  
 ■ ■  
 CI II III D1

LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

LIGHT SOURCE  
 BATTERIES  
 LENGTH  
 COLORS  
 APPROVALS

ANSI STANDARDS

**STEALTHLITE™ 2410 RECOIL™ LED PHOTOLUMINESCENT**



Recoil™ LED  
 4 AA Alkaline (Included)  
 7" (17.8cm)  
 ■  
 CI II III D1

LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

LIGHT SOURCE  
 BATTERIES  
 LENGTH  
 COLORS  
 APPROVALS

ANSI STANDARDS

**STEALTHLITE™ RECHARGEABLE 2460 RECOIL™ LED**



Recoil™ LED  
 4 AA NiMH (Included)  
 7" (17.8cm)  
 ■ ■  
 CI II D2

LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

LIGHT SOURCE  
 BATTERIES  
 LENGTH  
 COLORS  
 APPROVALS

ANSI STANDARDS

**2490 RECOIL™ LED (WITH TRAFFIC WAND AND COLORED LENS DISCS)**



Recoil™ LED  
 4 AA Alkaline (Not included)  
 12.5" (31.7cm)  
 □  
 N/A

LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

LIGHT SOURCE  
 BATTERIES  
 LENGTH  
 COLORS  
 APPROVALS

ANSI STANDARDS

**LITTLE ED™ 3610 RECOIL™ LED**



Recoil™ LED  
 4 AA Alkaline (Included)  
 7.51" (19.1cm)  
 ■ ■  
 CI II III D1

LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

LIGHT SOURCE  
 BATTERIES  
 LENGTH  
 COLORS  
 APPROVALS

ANSI STANDARDS

**LITTLE ED™ 3610 RECOIL™ LED PHOTOLUMINESCENT**



Recoil™ LED  
 4 AA Alkaline (Included)  
 7.51" (19.1cm)  
 ■  
 CI II III D1

LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

LIGHT SOURCE  
 BATTERIES  
 LENGTH  
 COLORS  
 APPROVALS

ANSI STANDARDS

**LITTLE ED™ RECHARGEABLE 3660 RECOIL™ LED**




Recoil™ LED  
 4 AA NiMH (Included)  
 7.51" (19.1cm)  
 ■ ■  
 CI II D2

LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

LIGHT SOURCE  
 BATTERIES  
 LENGTH  
 COLORS  
 APPROVALS

ANSI STANDARDS

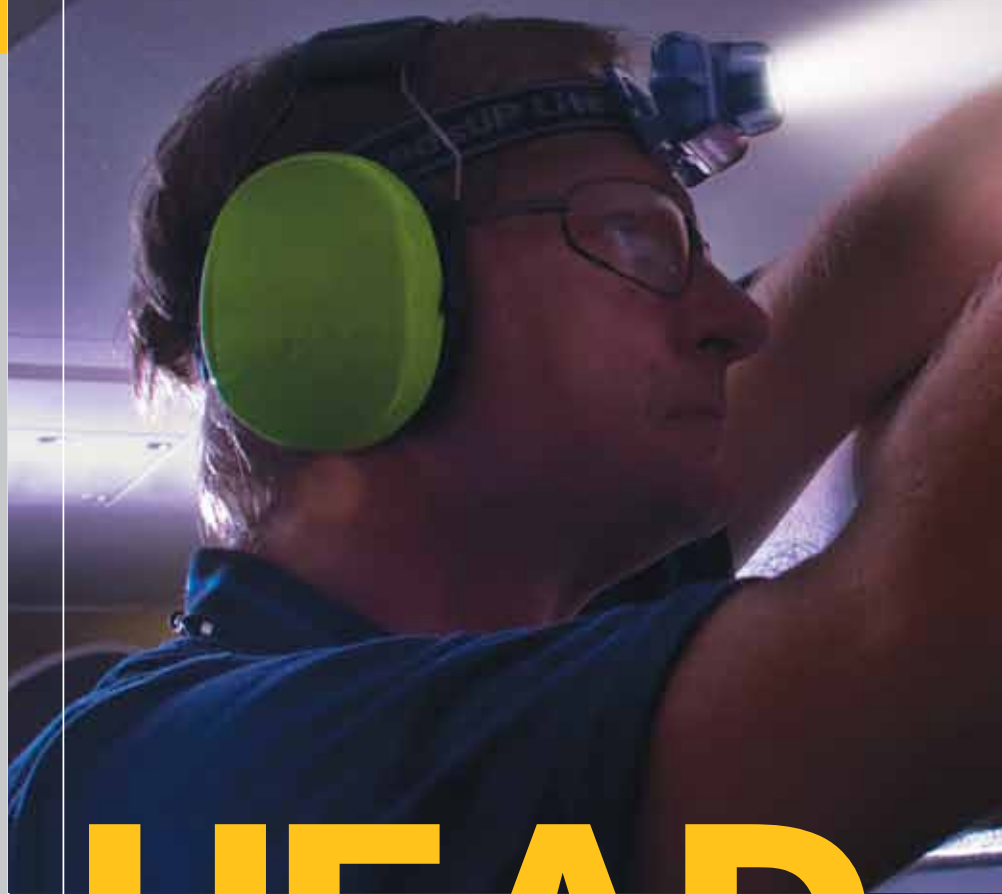


# HEAD LIGHTS

### FREE YOUR HANDS

For two-handed tasks on the factory floor or at base camp, Pelican™ head lights lead the way. Super bright Incandescent and LED models include a rubber strap for helmet/hard hat use as well as an adjustable cloth strap. The lightweight 2690 features a rotary bezel switch that is easy to operate, even while wearing bulky gloves.

**HEADSUP LITE™ 2690 LED**  
 ■ RUN TIME: 10 hrs. 30 mins.  
 ■ LIGHT OUTPUT: 60 LUMENS

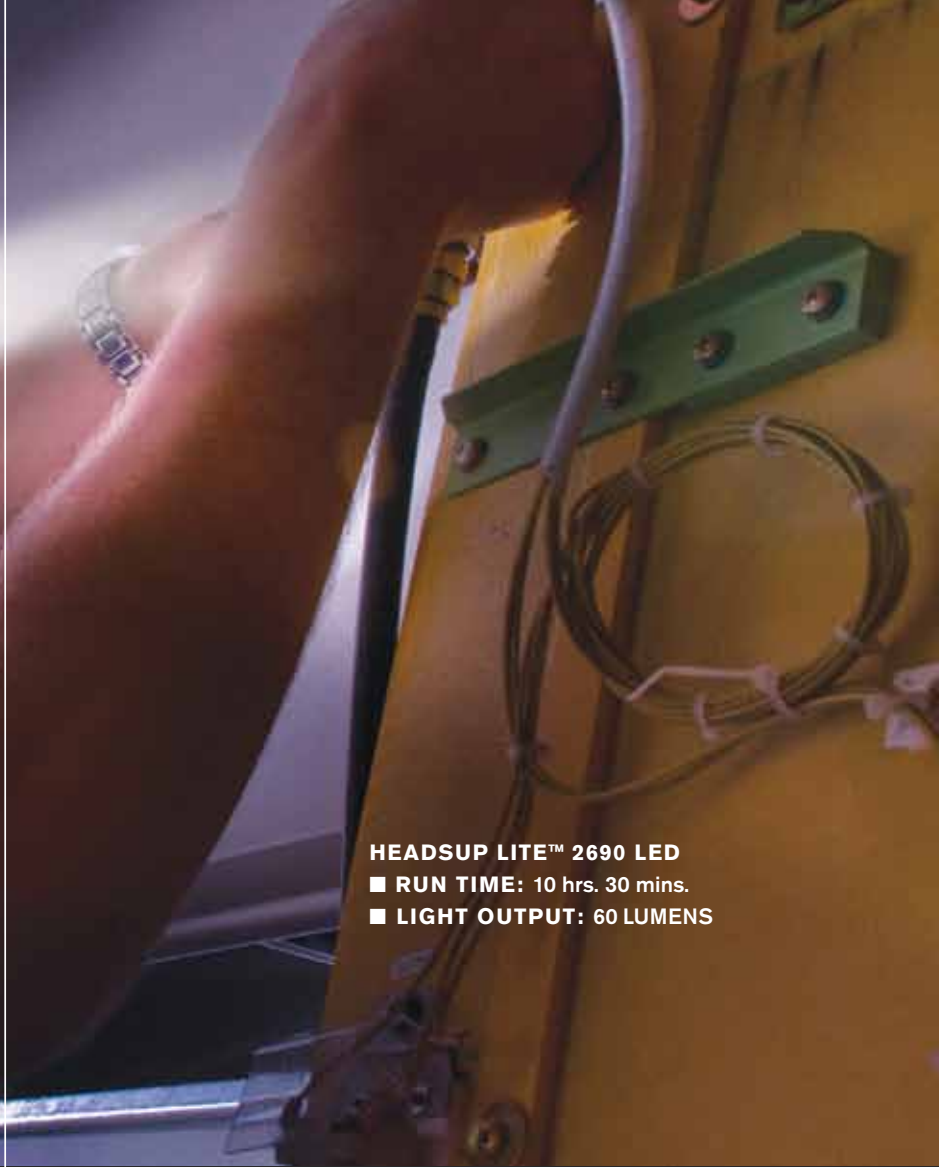

### HEADSUP LITE™ 2600

	Krypton (primary) Krypton (back-up)			
	4 AA Alkaline (Included)			
	3.81" (9.7cm)			
	■			
	CI II III D2			
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

- LIGHT SOURCE
- BATTERIES
- LENGTH
- COLORS
- APPROVALS

#### ANSI STANDARDS

### HEADSUP LITE™ 2640

	Halogen (high) LED (low)			
	4 AA Alkaline (Included)			
	2.63" (6.7cm)			
	■			
	CI D2			
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

- LIGHT SOURCE
- BATTERIES
- LENGTH
- COLORS
- APPROVALS

#### ANSI STANDARDS

### HEADSUP LITE™ 2610 LED

	LED			
	3 AAA Alkaline (Included)			
	1.49" (3.8cm)			
	■			
	CI D1			
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

- LIGHT SOURCE
- BATTERIES
- LENGTH
- COLORS
- APPROVALS

#### ANSI STANDARDS

### HEADSUP LITE™ 2680 RECOIL™ LED

	Recoil™ LED			
	4 AA Alkaline (Included)			
	4.64" (11.8cm)			
	■			
	CI II III D2			
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

### HEADSUP LITE™ 2620

	Xenon (high) LED (low)			
	3 AAA Alkaline (Included)			
	2.16" (5.5cm)			
	■			
	CI D1			
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

### HEADSUP LITE™ 2690 LED

	LED			
	3 AAA Alkaline (Included)			
	2.81" (7.1cm)			
	■			
	CI II III D1			
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

**BIG ED™ 3700**  
 ■ RUN TIME: 6 hrs. 15 mins.  
 ■ LIGHT OUTPUT: 39 LUMENS

# SPECIALTY LIGHTS



## THE RIGHT ANGLE FOR THE JOB

Designed for the fire fighter and search and rescue personnel, the Big Ed™ cuts through thick smoke, fog, and dust with its advanced reflector and high power Krypton lamp module. Hands-free design for a turn out coat but equally comfortable in your hand.

### BIG ED™ 3700

	Krypton (primary) Krypton (back-up)			
	4 C Alkaline (Not included)			
	7" (17.8cm)			
				
	CI D2			
				
<b>LIGHT OUTPUT</b>	<b>RUNTIME</b>	<b>BEAM DISTANCE</b>	<b>PEAK BEAM INTENSITY</b>	<b>WATER RESISTANT</b>

### BIG ED™ 3700 PHOTOLUMINESCENT

	Krypton (primary) Krypton (back-up)			
	4 C Alkaline (Not included)			
	7" (17.8cm)			
				
	CI D2			
				
<b>LIGHT OUTPUT</b>	<b>RUNTIME</b>	<b>BEAM DISTANCE</b>	<b>PEAK BEAM INTENSITY</b>	<b>WATER RESISTANT</b>

### BIG ED™ RECHARGEABLE 3750

	Krypton (primary) Krypton (back-up)			
	4 C NiCad (Included)			
	7" (17.8cm)			
				
	CI D2			
				
<b>LIGHT OUTPUT</b>	<b>RUNTIME</b>	<b>BEAM DISTANCE</b>	<b>PEAK BEAM INTENSITY</b>	<b>WATER RESISTANT</b>

### BIG ED™ RECHARGEABLE 3750 PHOTOLUMINESCENT

	Krypton (primary) Krypton (back-up)			
	4 C NiCad (Included)			
	7" (17.8cm)			
				
	CI D2			
				
<b>LIGHT OUTPUT</b>	<b>RUNTIME</b>	<b>BEAM DISTANCE</b>	<b>PEAK BEAM INTENSITY</b>	<b>WATER RESISTANT</b>





**NEMO™ 4300**  
 ■ RUN TIME: 6 hrs.  
 ■ LIGHT OUTPUT: 175 LUMENS  
 ■ SUBMERSIBLE: 100m

# NEMO DIVE SERIES



## SCUBA

Discover new underwater worlds with the help of our extensive selection of dive lights. Whether in search of a pocket model, such as the lightweight 1965N that fits in your BC pocket, or a primary light with long burn time such as the Nemo™ 4300, there is a member of the Pelican™ Nemo™ family to suit your diving needs.

LIGHT SOURCE
BATTERIES
LENGTH
COLORS
APPROVALS
ANSI STANDARDS

### NEMO™ 1900

	Xenon			
	2 AAA Alkaline (Included)			
	4.09" (10.4 cm)			
	N/A			
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

### NEMO™ 1960 LED

	LED			
	2 AAA Alkaline (Included)			
	5.48" (13.9cm)			
	N/A			
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

### NEMO™ 2000

	Xenon			
	3 C Alkaline (Not included)			
	7.79" (19.8cm)			
	N/A			
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

### NEMO™ 2010 RECOIL™ LED

	Recoil™ LED			
	3 C Alkaline (Not included)			
	8.11" (20.6cm)			
	N/A			
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

### NEMO™ 2400

	Xenon			
	4 AA Alkaline (Included)			
	6.49" (16.5cm)			
	N/A			
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

### NEMO™ 2410 RECOIL™ LED

	Recoil™ LED			
	4 AA Alkaline (Included)			
	7" (17.8cm)			
	N/A			
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE

### NEMO™ 4300

	Xenon			
	8 C Alkaline (Not included)			
	7.5" (19cm)			
	N/A			
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATERPROOF & SUBMERSIBLE



**9410 LED LANTERN**  
 ■ RUN TIME: 1 hrs. 45 mins.  
 ■ LIGHT OUTPUT: 710 LUMENS

**PACK THE POWER, NOT THE POUNDS**

Our heavy duty lights are big on performance, yet light in weight. Smart features for the KingLite™ include dual filament Xenon lamp with back-up housed behind the reflector, multi-position handle, and dual direction switch with lock. The rechargeable 9410 LED Lantern uses four LEDs (for high, low, and flashing mode) powered by the latest generation NiMH batteries with charge status indicator.

# HEAVY DUTY LIGHTS

**KINGLITE™ 4000**

	Xenon			
	8 D Alkaline (Not included)			
	9.37" (23.8cm)			
CI II D2				
251.0 LUMENS (Non ANSI)	FL I STANDARD	FL I STANDARD	FL I STANDARD	FL I STANDARD
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

- LIGHT SOURCE
- BATTERIES
- LENGTH
- COLORS
- APPROVALS
- ANSI STANDARDS

**9410 LED LANTERN**

**NEW**

	LED			
	4 D Ni-MH (Included)			
	8.75" (22.2cm)			
N/A				
HIGH 710 LUMENS LOW 300 LUMENS	HIGH 1h 45min LOW 4h 45min	HIGH 425m LOW 249m	HIGH 45260cd LOW 15516cd	FL I STANDARD
LIGHT OUTPUT	RUNTIME	BEAM DISTANCE	PEAK BEAM INTENSITY	WATER RESISTANT

- LIGHT SOURCE
- BATTERIES
- LENGTH
- COLORS
- APPROVALS
- ANSI STANDARDS





# LIGHT MOUNTING SYSTEMS AND HOLSTERS



Our tactical pressure switch replaces the standard tailcap on the flashlight. A 6" cord attached to a 2" pressure-sensitive switch mounts to the foregrip.



### 610 FRONT SIGHT MOUNT

Fits Pelican Lights - 2320, 2330, 2390  
Includes Remote Pressure Switch. For use with: AR15, M16, and M4 Carbine



### 630 FOREGRIP MOUNT

Fits Pelican Lights - 2320, 2330, 2390  
Includes Remote Pressure Switch. For use with: Heckler, and Koch MP5



### 620 SIDE SLING MOUNT

Fits Pelican Lights - 2320, 2330, 2390  
Includes Remote Pressure Switch. For use with: AR15, M16, and M4 Carbine



### 2326 REMOTE PRESSURE SWITCH

Fits Pelican Lights -2320, 2330, 2390  
COLOR: Black • WT.: 2.0 oz.

## HOLSTER STYLE



PELICAN™ FLASHLIGHT	2327	2357	2407	7076	7078	7079	8057
2300	•						
2320	•						
2330	•						
2390	•						
2340/NVG		•					
2400/NVG			•				
2400PL			•				
2450			•				
2410			•				
2410PL			•				
2460			•				
7060				•	•	•	
8040							•
8050							•





# HELMET LIGHT HOLDERS



**770 UNIVERSAL HELMET LIGHT HOLDER**  
Fits most known helmet designs and functions with 16 different Pelican flashlights. Tough polymer construction with brass inserts and stainless steel hardware.

**Fits the Following Pelican Lights:**

- MityLite™ 2300
- M6 2320
- M6 2330 LED
- MityLite™ 2340 & 2340NVG
- M6 3W 2390 LED
- StealthLite™ 2400, 2400NVG & 2400PL Photoluminescent
- StealthLite™ 2410 Recoil™ LED & 2410PL Recoil™ LED Photoluminescent
- MityLite™ 2430
- StealthLite™ Rechargeable 2450
- StealthLite™ Rechargeable 2460 Recoil™ LED
- PM6 3320
- PM6 3330 LED
- Other Helmet Light Holders available (see chart on next page)

	LIGHT HOLDER STYLE							
	CAT. #700	CAT. #710	CAT. #711	CAT. #712	CAT. #722	CAT. #750	CAT. #760	CAT. #760
<b>PELICAN™ FLASHLIGHT</b>								
<b>1900/NVG</b>					•			
<b>1960</b>					•			
<b>2140</b>						•	•	
<b>2250</b>	•					•	•	
<b>2300</b>					•	•	•	•
<b>2320</b>								•
<b>2330</b>								•
<b>2340/NVG</b>					•	•	•	•
<b>2390</b>								•
<b>2400/NVG/PL</b>	•	•	•	•		•	•	•
<b>2410/PL</b>	•	•	•	•		•	•	•
<b>2430</b>	•	•	•	•		•	•	•
<b>2450</b>	•	•	•	•		•	•	•
<b>2460</b>	•	•	•	•		•	•	•
<b>3320</b>								•
<b>3330</b>								•

REMOTE AREA LIGHTING SYSTEMS

Cat No.	Model Name	Light Source	Batteries	Lumens	Runtime	Beam Spread	Number of LEDs	Lamp Heads	Approvals	Length	Weight	Colors
9430	9430 Remote Area Lighting System	High Flux LED	12v Rechargeable, Sealed	1000 (Low) 2000 (High)	15 hrs. (Low) 8 hrs. (High)	90°	24 LEDs per head	1	N/A	15.75" (40 cm) closed 32.28" (82 cm) extended	22.65 lbs. (10.27 kg)	
9430IR	9430IR Infrared Remote Area Lighting System	Infrared 940nm	12v Rechargeable, Sealed	N/A	15 hrs. (Low) 8 hrs. (High)	N/A	24 LEDs per head	1	N/A	15.75" (40 cm) closed 32.28" (82 cm) extended	22.05 lbs. (10 kg)	
9430SL	9430SL Spot Light Remote Area Lighting System	High Flux LED	12v Rechargeable, Sealed	1000 (Low) 2000 (High)	15 hrs. (Low) 8 hrs. (High)	10°	24 LEDs per head	1	N/A	15.75" (40 cm) closed 32.28" (82 cm) extended	22.05 lbs. (10 kg)	
9435	9435 Remote Area Lighting System	High Flux LED	NiMH	750 (Low) 1500 (High)	10 hrs. (Low) 5 hrs. (High)	90°	18 LEDs per head	1	CI D2	15.75" (40 cm) closed 32.28" (82 cm) extended	17.6 lbs. (7.98 kg)	
9440	9440 Remote Area Lighting System	LED	NiMH	1200 (Low) 2400 (High)	6 hrs. (Low) 3 hrs. (High)	120°	10 LEDs per head	1	N/A	37.4" (95 cm) closed 86.25" (219 cm) extended	16.09 lbs. (7.3 kg)	
9460	9460 Remote Area Lighting System	High Flux LED	12v Rechargeable, Sealed	2000 (Low) 4000 (High)	14 hrs. (Low) 7 hrs. (High)	90°	24 LEDs per head	2	N/A	22" (55.9 cm) closed 70.87" (179.9 cm) extended	50.71 lbs. (23 kg)	
9470	9470 Remote Area Lighting System	High Flux LED	12v Rechargeable, Sealed	4000 (Low) 8000 (High)	14 hrs. (Low) 7 hrs. (High)	90°	24 LEDs per head	4	N/A	24.83" (63 cm) closed 72.85" (185 cm) extended	88.18 lbs. (40 kg)	
9500	9500 Shelter Lighting System	High Flux LED	N/A	400 (Red) 2000 (White)	Constant 120V	210° Diffused	36 LEDs per head 24 White/ 12 Red	3	N/A	20.62" (52.4 cm)	29.8 lbs. (13.52 kg)	
Cat No.	Model Name	Light Source	Batteries	ANSI Light Output	ANSI Runtime	ANSI Beam Distance	ANSI Peak Beam Intensity	ANSI Waterproof/Submersible/Water Resistant	Approvals	Length	Weight with Batteries	Colors
1900	MityLite™ 1900	Xenon	2 AAA Alkaline (Included)	11 LUMENS	1h 30m	45m	571cd	IPX7	CI D1	4.09" (10.4 cm)	1.6 oz. (0.05 kg)	
1910	1910 LED	LED	1 AAA Alkaline (Included)	39 LUMENS	1h	62m	967cd	IPX4	N/A	3.6" (9.1 cm)	1.4 oz. (0.04 kg)	
1920	1920 LED	LED	2 AAA Alkaline (Included)	67 LUMENS	2h 45m	81m	1648cd	IPX4	N/A	5.3" (13.5 cm)	2.2 oz. (0.06 kg)	
1960	MityLite™ 1960 LED	LED	2 AAA Alkaline (Included)	24 LUMENS	3h	51m	657cd	IPX7	N/A	5.48" (13.9 cm)	1.9 oz. (0.05 kg)	
1965	MityLite™ 1965 LED	LED	2 AAA Alkaline (Included)	21 LUMENS	4h	51m	756cd	IPX4	CI II III D1	5.48" (13.9 cm)	1.9 oz. (0.05 kg)	
2140	Tracker™ 2140	Xenon	2 AAA Alkaline (Included)	13 LUMENS	2h	84m	1761cd	IPX7	CI D2	3.5" (8.9 cm)	1.8 oz. (0.05 kg)	

PERSONAL LIGHTS

Cat No.	Model Name	Light Source	Batteries	ANSI Light Output	ANSI Runtime	ANSI Beam Distance	ANSI Peak Beam Intensity	ANSI Waterproof/Submersible/Water Resistant	Approvals	Length	Weight with Batteries	Colors
2250	VersaBrite™ 2250 Deluxe Light Kit	Xenon	2 AA Alkaline (Included)	7 LUMENS	5h 30m	54m	726cd	IPX4	CI II D2	3.87" (9.8 cm)	3 oz. (0.09 kg)	
2300	MityLite™ 2300	Xenon	2 AA Alkaline (Included)	11 LUMENS	4h 30m	43m	478cd	IPX4	CI D1	5.62" (14.3 cm)	3.4 oz. (0.1 kg)	
2340	MityLite™ 2340	Xenon	2 AA Alkaline (Included in select packaging)	10 LUMENS	4h 30m	43m	461cd	IPX4	CI D1	6.25" (15.9 cm)	3.5 oz. (0.1 kg)	
1800	PeliLite™ 1800	Xenon	2 C Alkaline (Not included)	21 LUMENS	7h	131m	4370cd	IPX7	CI II D2	6" (15.2 cm)	7.8 oz. (0.22 kg)	
1820	Pocket Sabre™ 1820	Xenon	2 C Alkaline (Included in select packaging)	22 LUMENS	6h 45m	146m	5466cd	IPX7	CI II III D2	5.83" (14.8 cm)	8.3 oz. (0.24 kg)	
2000	SabreLite™ 2000	Xenon	3 C Alkaline (Not included)	53 LUMENS	5h	158m	6234cd	IPX7	CI D2	7.79" (19.8 cm)	12.8 oz. (0.36 kg)	
2000PL	SabreLite™ 2000 Photoluminescent	Xenon	3 C Alkaline (Not included)	53 LUMENS	5h	158m	6234cd	IPX7	CI D2	7.79" (19.8 cm)	12.8 oz. (0.36 kg)	
2400	StealthLite™ 2400	Xenon	4 AA Alkaline (Included)	45 LUMENS	3h 45m	125m	3934cd	IPX7	CI D1	6.49" (16.5 cm)	7.1 oz. (0.2 kg)	
2400PL	StealthLite™ 2400 Photoluminescent	Xenon	4 AA Alkaline (Included)	45 LUMENS	3h 45m	125m	3934cd	IPX7	CI D1	6.49" (16.5 cm)	7.1 oz. (0.2 kg)	
2430	MityLite™ 2430	Xenon	4 AA Alkaline (Included)	70 LUMENS	2h 15m	104m	2766cd	IPX4	CI D2	6.5" (16.5 cm)	6.1 oz. (0.17 kg)	
2450	StealthLite™ Rechargeable 2450	Xenon	4 AA NiMH (Included)	35 LUMENS	3h 30m	122m	3735cd	IPX7	CI II D2	6.5" (16.5 cm)	7.8 oz. (0.22 kg)	
2320	M6 2320	Xenon	2 CR123 Lithium (Included)	82 LUMENS	1h 15m	145m	5260cd	IPX4	N/A	5.51" (14 cm)	5.6 oz. (0.16 kg)	
3320	PM6 3320	Xenon	2 CR123 Lithium (Included)	81 LUMENS	1h 30m	131m	4330cd	IPX4	N/A	5.27" (13.4 cm)	3.45 oz. (0.1 kg)	
3390	3390 Knife/Lite Combo	Xenon	2 CR123 Lithium (Included)	81 LUMENS	1h 30m	131m	4330cd	IPX4	N/A	5.27" (13.4 cm) (light length)	3.45 oz. (0.1 kg) (light weight)	
8040	M10 8040	Xenon	4 C Alkaline (Not included)	67 LUMENS	5h 15m	198m	9820cd	IPX4	CI II III D2	11.25" (28.6 cm)	18.4 oz. (0.52 kg)	
8050	M11 Rechargeable 8050	Xenon	4 C NiCad (Included)	137 LUMENS	1h 30m	234m	13,707cd	IPX4	N/A	11.25" (28.6 cm)	17.92 oz. (0.51 kg)	

MEDIUM DUTY LIGHTS

TACTICAL / DUTY LIGHTS

TACTICAL/DUTY LED LIGHTS

Cat No.	Model Name	Light Source	Batteries	ANSI Light Output	ANSI Runtime	ANSI Beam Distance	ANSI Peak Beam Intensity	ANSI Waterproof/Submersible/Water Resistant	Approvals	Length	Weight with Batteries	Colors
2330	M6 2330 LED	LED	2 CR123 Lithium (Included)	100 LUMENS	6h	93m	2184cd	IPX4	N/A	5.51" (14 cm)	5.5 oz. (0.16 kg)	■
2360	2360 LED	LED	2 AA Alkaline (Not Included)	94 LUMENS	2h 15m	139m	4893cd	IPX4	N/A	6.1" (15.5 cm)	4.6 oz. (0.13 kg)	■
2390	M6 3W 2390 LED	LED	2 CR123 Lithium (Included)	177 LUMENS	2h 30m	155m	6002cd	IPX4	N/A	5.31" (13.5 cm)	5.6 oz. (0.16 kg)	■ ■
3330	PM6 3330 LED	LED	2 CR123 Lithium (Included)	90 LUMENS	4h 45m	88m	1959cd	IPX4	N/A	5.27" (13.4 cm)	3.45 oz. (0.1 kg)	■ ■ ■
7060	7060 LED	LED	1 3.7 V, 2200 mAh Lithium-Ion (Included)	160 LUMENS	2h	254m	16,101cd	IPX4	N/A	8.65" (22 cm)	10.4 oz. (0.29 kg)	■
8060	8060 LED	LED	4 C SIZE Ni-MH (Included)	179 LUMENS	6h 45m	279m	19,525cd	IPX4	N/A	12.67" (32.2 cm)	23.2 oz. (0.66 kg)	■
1830	L4™ 1830 LED	LED	3 AAAA Alkaline (Included)	5 LUMENS	32h	13m	44cd	IPX4	CI D1	6.2" (15.7 cm)	1.2 oz. (0.03 kg)	■ ■ ■
1930	L1™ 1930 LED	LED	4 LR 44 Alkaline (Included)	12 LUMENS	4h 15m	17m	70cd	IPX4	CI D1	2.64" (6.7 cm)	0.9 oz. (0.03 kg)	■ ■ ■
2130	Mini Flasher™ 2130 LED	LED	2 L1154 Alkaline (Included)	4.7 LUMENS (Non ANSI)	130h (Non ANSI)	N/A	N/A	IPX7	N/A	1.73" (4.4 cm)	0.5 oz. (0.01 kg)	■ ■
2130IR	Mini Flasher™ 2130IR LED	LED	2 L1154 Alkaline (Included)	N/A	65h (Non ANSI)	N/A	N/A	IPX7	N/A	1.73" (4.4 cm)	0.5 oz. (0.01 kg)	■
2220	VB3™ 2220 LED	LED	2 CR2032 Lithium (Included)	9 LUMENS	34h	12m	38cd	IPX4	CI D1	3.5" (8.9 cm)	1 oz. (0.03 kg)	■ ■ ■ ■ ■ ■ *
2220NV	VB3™ 2220NV LED	LED	2 CR2032 Lithium (Included)	1 LUMEN (Non ANSI)	100h (Non ANSI)	N/A	N/A	IPX4	C1D1	3.5" (8.9 cm)	1 oz. (0.03 kg)	■
2365	2365 LED Flex Neck	LED	2 AA Alkaline (Not Included)	49 LUMENS	7h	81m	1644cd	IPX4	N/A	21.92" (55.7 cm)	9.3 oz. (0.26 kg)	■
2010	SabreLite™ 2010 Recoil™ LED	Recoil™ LED	3 C Alkaline (Not included)	56 LUMENS	43h	74m	1359cd	IPX7	CI II III D1	8.11" (20.6 cm)	13.4 oz. (0.38 kg)	■ ■ ■
2010PL	SabreLite™ 2010 Recoil™ LED Photoluminescent	Recoil™ LED	3 C Alkaline (Not included)	56 LUMENS	43h	74m	1359cd	IPX7	CI II III D1	8.11" (20.6 cm)	13.4 oz. (0.38 kg)	■ ■
2020	SabreLite™ 2020 Recoil™ LED	Recoil™ LED	3 C Alkaline (Not included)	75 LUMENS	6h 30m	113m	3211cd	IPX4	CI II D1	8.75" (22.2 cm)	14.7 oz. (0.42 kg)	■ ■ ■
2410	StealthLite™ 2410 Recoil™ LED	Recoil™ LED	4 AA Alkaline (Included)	72 LUMENS	7h 15m	102m	2622cd	IPX7	CI II III D1	7" (17.8 cm)	7.3 oz. (0.21 kg)	■ ■ ■

\* translucent color

LED AND RECOIL LIGHTS

Cat No.	Model Name	Light Source	Batteries	ANSI Light Output	ANSI Runtime	ANSI Beam Distance	ANSI Peak Beam Intensity	ANSI Waterproof/Submersible/Water Resistant	Approvals	Length	Weight with Batteries	Colors
2410PL	StealthLite™ 2410 Recoil™ LED Photoluminescent	Recoil™ LED	4 AA Alkaline (Included)	72 LUMENS	7h 15m	102m	2622cd	IPX7	CI II III D1	7" (17.8 cm)	7.3 oz. (0.21 kg)	■ ■
2460	StealthLite™ Rechargeable 2460 Recoil™ LED	Recoil™ LED	4 AA NiMH (Included)	73 LUMENS	4h 15m	99m	2454cd	IPX7	CI II D2	7" (17.8 cm)	7.8 oz. (0.22 kg)	■ ■ ■
2490	2490 Recoil™ LED (with Traffic Wand)	Recoil™ LED	4 AA Alkaline (Not included)	51 LUMENS	15h	88m	1930cd	IPX7	N/A	12.5" (31.7 cm)	8.2 oz. (0.23 kg)	■
3610	Little Ed™ 3610 Recoil™ LED	Recoil™ LED	4 AA Alkaline (Included)	72 LUMENS	7h 15m	102m	2622cd	IPX7	CI II III D1	7.51" (19.1 cm)	10.5 oz. (0.3 kg)	■ ■ ■
3610PL	Little Ed™ 3610 Recoil™ LED Photoluminescent	Recoil™ LED	4 AA Alkaline (Included)	72 LUMENS	7h 15m	102m	2622cd	IPX7	CI II III D1	7.51" (19.1 cm)	10.5 oz. (0.3 kg)	■ ■
3660	Little Ed™ Rechargeable 3660 Recoil™ LED	Recoil™ LED	4 AA NiMH (Included)	73 LUMENS	4h 15m	99m	2454cd	IPX4	CI II D2	7.51" (19.1 cm)	10.56 oz. (0.3 kg)	■ ■ ■
2600	HeadsUp Lite™ 2600	Krypton	4 AA Alkaline (Included)	18 LUMENS	3h 30m	27m	203cd	IPX7	CI II III D2	3.81" (9.7 cm)	9.7 oz. (0.27 kg)	■
2610	HeadsUp Lite™ 2610 LED	LED	3 AAA Alkaline (Included)	30 LUMENS	19h	28m	194cd	IPX4	CI D1	1.49" (3.8 cm)	3.2 oz. (0.09 kg)	■
2620	HeadsUp Lite™ 2620	Xenon (High) LED Low	3 AAA Alkaline (Included)	26 (High) 14 (Low) LUMENS	2h 15m (High) 18h (Low)	44m (High) 29m (Low)	491cd (High) 216cd (Low)	IPX4	CI D1	2.16" (5.5 cm)	4.8 oz. (0.14 kg)	■
2640	HeadsUp Lite™ 2640	Halogen (High) LED Low	4 AA Alkaline (Included)	29 (High) 16 (Low) LUMENS	2h 45m (High) 17h (Low)	46m (High) 20m (Low)	586cd (High) 103cd (Low)	IPX4	CI D2	2.63" (6.7 cm)	10.9 oz. (0.31 kg)	■
2680	HeadsUp Lite™ 2680 Recoil™ LED	Recoil™ LED	4 AA Alkaline (Included)	69 LUMENS	9h 30m	123m	3788cd	IPX7	CI II III D2	4.64" (11.8 cm)	9.7 oz. (0.27 kg)	■
2690	HeadsUp Lite™ 2690 LED	LED	3 AAA Alkaline (Included)	60 LUMENS	10h 30m	81m	1664cd	IPX4	CI II III D1	2.81" (7.1 cm)	4.1 oz. (0.12 kg)	■
3700	Big Ed™ 3700	Krypton	4 C Alkaline (Not included)	39 (High) 25 (Backup) LUMENS	6h 15m (High) 8h 30m (Backup)	98m (High) 51m (Backup)	2437cd (High) 684cd (Backup)	IPX4	CI D2	7" (17.8 cm)	20.32 oz. (0.58 kg)	■ ■
3700PL	Big Ed™ 3700 Photoluminescent	Krypton	4 C Alkaline (Not included)	39 (High) 25 (Backup) LUMENS	6h 15m (High) 8h 30m (Backup)	98m (High) 51m (Backup)	2437cd (High) 684cd (Backup)	IPX4	CI D2	7" (17.8 cm)	20.32 oz. (0.58 kg)	■ ■
3750	Big Ed™ Rechargeable 3750	Krypton	4 C NiCad (Included)	96(High) 28 (Backup) LUMENS	1h 45m (High) 4h (Backup)	133m (High) 65m (Backup)	4468cd (High) 1048cd (Backup)	IPX4	CI D2	7" (17.8 cm)	20.48 oz. (0.58 kg)	■ ■
3750PL	Big Ed™ Rechargeable 3750 Photoluminescent	Krypton	4 C NiCad (Included)	96(High) 28 (Backup) LUMENS	1h 45m (High) 4h (Backup)	133m (High) 65m (Backup)	4468cd (High) 1048cd (Backup)	IPX4	CI D2	7" (17.8 cm)	20.48 oz. (0.58 kg)	■ ■

\* translucent color

DIVE LIGHTS

HEAVY DUTY

Cat No.	Model Name	Light Source	Batteries	ANSI Light Output	ANSI Runtime	ANSI Beam Distance	ANSI Peak Beam Intensity	ANSI Waterproof/Submersible/Water Resistant	Approvals	Length	Weight with Batteries	Colors
1900N	Nemo™ 1900	Xenon	2 AAA Alkaline (Included)	11 LUMENS	1h 30m	45m	571cd	IPX8	N/A	4.09" (10.4 cm)	1.6 oz. (0.05 kg)	Black, Yellow, Blue
1960N	Nemo™ 1960	LED	2 AAA Alkaline (Included)	24 LUMENS	3h	51m	657cd	IPX8	N/A	5.48" (13.9 cm)	1.9 oz. (0.05 kg)	Black, Yellow, Blue
2000N	Nemo™ 2000	Xenon	3 C Alkaline (Not included)	53 LUMENS	5h	158m	6234cd	IPX8	N/A	7.79" (19.8 cm)	12.8 oz. (0.36 kg)	Black, Yellow, Blue
2010N	Nemo™ 2010 Recoil™ LED	Recoil™ LED	3 C Alkaline (Not included)	56 LUMENS	43h	74m	1359cd	IPX8	N/A	8.11" (20.6 cm)	13.4 oz. (0.38 kg)	Black, Yellow, Blue
2400N	Nemo™ 2400	Xenon	4 AA Alkaline (Included)	45 LUMENS	3h 45m	125m	3934cd	IPX8	N/A	6.49" (16.5 cm)	7.1 oz. (0.2 kg)	Black, Yellow, Blue
2410N	Nemo™ 2410 Recoil™ LED	Recoil™ LED	4 AA Alkaline (Included)	72 LUMENS	7h 15m	102m	2622cd	IPX8	N/A	7" (17.8 cm)	7.3 oz. (0.21 kg)	Black, Yellow, Blue
4300N	Nemo™ 4300	Xenon	8 C Alkaline (Not included)	276 LUMENS (Non ANSI)	6h	143m	5222cd	IPX8	N/A	7.5" (19 cm)	36.64 oz. (1.04 kg)	Black, Yellow, Blue
4000	KingLite™ 4000	Xenon	8 D Alkaline (Not included)	251 LUMENS (Non ANSI)	11h	106m	3168cd	IPX4	CI II D2	9.37" (23.8 cm)	74.08 oz. (2.1 kg)	Black, Yellow, Orange
9410	9410 LED Lantern	LED	4 D Ni-MH (Included)	710 (High) 300 (Low) LUMENS	1h 45m (High) 4h 45m (Low)	425m (High) 249m (Low)	45,260cd (High) 15,516cd (Low)	IPX4	N/A	8.75" (22.2 cm)	49.28 oz. (1.4 kg)	Black, Yellow



**PRIVATE LABEL**

Pelican Products offers the ultimate in private labeling. You can put your company name and logo or a special statement on many Pelican lights. Our in-house private label molding and production department has complete short and long run capabilities for a variety of custom

applications and custom colors. We have the latest hot stamping equipment, utilizing the world's most durable epoxy inks and foils in our screening, hot tipping, embossing, and molding programs.



**GRAPHIC DESIGN STUDIO**

Our in-house graphics studio will take your logo and size it appropriately to the flashlight of your choice.



**HOT STAMPING DEPARTMENT**

Our hot stamping department, equipped with the latest technology in custom imprinting. Minimum quantities apply.



**100% ACCURACY**

Pelican's strict QA inspection team will check for quality of print and 100% accuracy in color and placement.



PELICAN AND PELICAN STORM CASES



MICRO CASES



SPECIALTY PRODUCTS



ROTO MOLDED PRODUCTS

**CASES AND SPECIALTY PRODUCTS**

The same durability and ingenuity built into every Pelican light also sets our cases and specialty products apart. We are protecting equipment in the world's harshest environments.

- Watertight cases for wet conditions
- Long cases for military and law enforcement
- Specialized laptop and organization solutions for off site jobs
- Micro Case protection for small electronics
- Specialty products for portable workspace and organization solutions

SEE OUR COMPLETE LINE OF CASES AND SPECIALTY PRODUCTS AT

**WWW.PELICAN.COM**

**FLASHLIGHTS****PELICAN LEGENDARY FULL LIFETIME GUARANTEE OF EXCELLENCE**

Pelican Products, Inc. guarantees its lights for a lifetime against breakage or defects in workmanship. This guarantee does not cover the lamp or batteries (rechargeable or alkaline).

Pelican will either repair or replace any defective product, at our sole option. THE REMEDIES HEREBY PROVIDED SHALL BE THE EXCLUSIVE AND SOLE REMEDY OF THE PURCHASER.

TO THE EXTENT PERMITTED BY LAW, IN NO EVENT SHALL PELICAN BE LIABLE FOR ANY INDIRECT, PUNITIVE, INCIDENTAL OR CONSEQUENTIAL DAMAGES, OR SPECIAL DAMAGES, REGARDLESS OF WHETHER A CLAIM FOR SUCH DAMAGES IS BASED ON WARRANTY, CONTRACT, NEGLIGENCE OR OTHERWISE. In no event shall Pelican's liability to the purchaser for damages hereunder exceed the purchase price of the product in respect of which damages are claimed.

To make a warranty claim, the purchaser must contact Pelican Products, Inc. at 23215 Early Avenue, Torrance, CA 90505 or sales@pelican.com. Any warranty claims shall be made by the purchaser as soon as practicable. The purchaser must obtain a return authorization number from Pelican Customer Service prior to returning any product. In the event that Pelican determines that any returned product is not defective, within the terms of this warranty, the purchaser shall pay Pelican all costs of handling, transportation and repairs at Pelican's prevailing rates.

All warranty claims of any nature are barred if the flashlight has been altered, damaged or in any way physically changed, or subjected to abuse, misuse, negligence or accident.

Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may have other rights which vary from state to state.

**Lifetime Guarantee does not cover Roto Molded or AALG products.**

**REMOTE AREA LIGHTING SYSTEMS****PELICAN 1 YEAR LIMITED WARRANTY FOR AALG PRODUCTS**

Pelican Products, Inc. ("Pelican") warrants to the original purchaser its Remote Area Lighting Systems (RALS) and all other products manufactured by the Advanced Area Lighting Group (AALG) against defects in materials and workmanship under normal use, service, and maintenance for a period of twelve months from the date of purchase. This warranty applies only to the original purchaser and is not transferable.

TO THE EXTENT PERMITTED BY LAW: (A) THIS WARRANTY IS IN LIEU OF ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE; AND (B) ALL OTHER IMPLIED WARRANTIES AND ANY LIABILITY NOT BASED UPON CONTRACT ARE HEREBY DISCLAIMED AND EXCLUDED.

TO THE EXTENT PERMITTED BY LAW, IN NO EVENT SHALL PELICAN BE LIABLE FOR ANY INDIRECT, PUNITIVE, INCIDENTAL OR CONSEQUENTIAL DAMAGES, OR SPECIAL DAMAGES, REGARDLESS OF WHETHER A CLAIM FOR SUCH DAMAGES IS BASED ON WARRANTY, CONTRACT, NEGLIGENCE OR OTHERWISE. In no event shall Pelican's liability to the purchaser for damages hereunder exceed the purchase price of the product in respect of which damages are claimed.

With valid dated proof of purchase, Pelican will either repair or replace any defective part, at our sole option. THE REMEDIES HEREBY PROVIDED SHALL BE THE SOLE AND EXCLUSIVE REMEDIES OF THE ORIGINAL PURCHASER. Any repaired or replacement part or unit is covered only for the unexpired portion of the warranty on the original product purchased.

To make a warranty claim, the purchaser must contact Pelican Products, Inc. at 23215 Early Avenue, Torrance, CA 90505 or sales@pelican.com. Any warranty claims shall be made by the original purchaser as soon as practicable following discovery of any defect and in no event more than twelve months from the date of purchase. The purchaser must provide valid dated proof of purchase and obtain a return authorization number from Pelican Customer Service prior to returning any product. In the event that Pelican determines that the returned product is not defective, within the terms of this warranty, the purchaser shall pay Pelican all costs of handling, transportation and repairs at Pelican's prevailing rates.

All warranty claims of any nature are barred if the product has been altered or in any way physically changed, or subjected to abuse, misuse, negligence or accident.

Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. This warranty gives you specific legal rights, and you may have other rights which vary from state to state.

## U.S.A.

### CALIFORNIA

23215 Early Avenue  
Torrance, CA 90505  
Tel: 310.326.4700  
800.473.5422  
Fax: 310.326.3311  
www.pelican.com

### MASSACHUSETTS

147 North Main Street  
South Deerfield, MA 01373  
Tel: 800.542.7344  
Fax: 413.665.8330  
www.pelican.com

### INDIANA

3802 N 600 W # B  
Greenfield, IN 46140-9642  
Tel: 317.866.2040  
www.pelican.com

## INTERNATIONAL

### EUROPE, MIDDLE EAST, & AFRICA

Peli Products, S.L.U.  
c/ Provença, 388, Planta 7  
08025 · Barcelona, Spain  
Tel: +34 934 674 999  
Fax: +34 934 877 393  
www.peli.com

### CHINA

Pelican Products China Representative Office  
Pine City Building, Room 1026  
777 Zhaojiabang Road  
Shanghai, China 200032  
Tel +86.21.64189685  
Fax +86.21.64189679  
www.pelican.com/cn

### JAPAN

Pelican Products K.K.  
Nisso 22 Bldg 9F  
1-11-10 Azabu Dai  
Minato ward Tokyo  
106-0041 Japan  
Tel +81 33 585 9100  
Fax +81 33 585 9109  
www.pelican.com/jp

### INDIA

Pelican Products and Services India Pvt. Ltd  
Level "4", Augusta Point, Sector-53, Golf  
Course Road,  
Gurgaon 122002 Haryana, India  
Tel: +91 124 4354148  
Fax: +91 124 4354001  
www.pelican.com

### CANADA

Pelican Products, Inc.  
10221-184th Street  
Edmonton, Alberta  
T5S 2J4 Canada  
Tel: 780.481.6076  
Fax: 780.481.9586  
www.pelican.ca

### AUSTRALIA

Pelican Products Pty Ltd  
Suite 2.33, Platinum West  
4 Ilya Avenue, Erina NSW 2250  
Australia  
Ph: +612 4367 7022  
Fax: +612 4367 7066  
www.pelicanaustralia.com

### KOREA

Pelican Products Korea Ltd  
#909 Hyundai 41 Tower, 917-9, Mok-dong,  
Yangchon-gu,  
Seoul, Korea  
Tel: +82 2 6092 4700  
Fax: +82 2 6792 4700  
www.pelican.com/ko



©2011 Pelican Products, Inc. All trademarks are registered and/or unregistered trademarks of Pelican Products, Inc., its subsidiaries and/or affiliates.

Part No. 0030-000-200 SEP.11

Cordura® is a registered trademark of INVISTA  
Lexan® is a registered trademark of SABIC

DISTRIBUTED BY:

## LIGHTS CATALOG

REMOTE AREA LIGHTS ■ TACTICAL / DUTY LIGHTS ■ SAFETY APPROVED LIGHTS ■ LED / RECOIL™ LED ■ DIVE

